
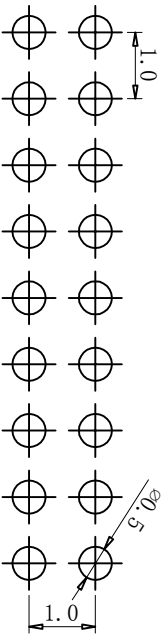

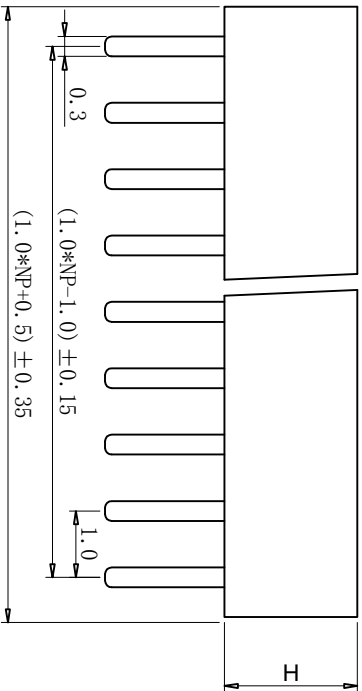


版本 REV	编号 ECON NO.	位置 LOCATIONS	变更内容 DESCRIPTION	日期 DATE	变更人 DESIGN
A0					

Specifications

1. Current Rating: 1amps
2. Insulator Resistance: 5000 Megohms min.
3. Dielectric withstanding Voltage: AC 500V
4. Operating Temperature: -40°C to +105°C
5. Contact Material: phosphor Bronze
6. Insulator Material: Asfollows
7. Plated: Asfollows

Ordering Information

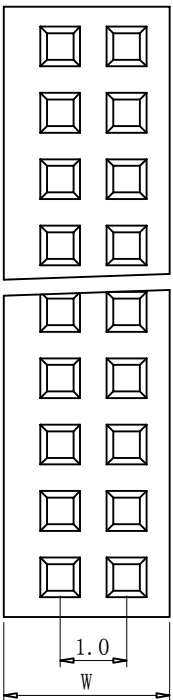

PCB LAYOUT



东莞市铂高电子制品有限公司

TOLERANCE UNLESS OTHERWISE SPECIFIED		品名 TITLE:	PHI.04H 180° 双排排母	制图 (D):	日期 (Date):	09.08.19
LINER	ANGLES	料号 (P/N):		审核 (CHKD):	日期 (Date):	
0 ± 0.3	0°	端子 (M/N)		核准 (APPD):	日期 (Date):	
.00 ± 0.2	.0°	比例 (SCALE)	1:1	张数 (SHEET):	SIZE:	A4
.000 ± 0.1	.00°	单位 (UNIT)	mm	板数 (XOFX)	级别 TYPE:	