




版本号	变更	说明	日期	签名
A	NEW		12.08.08	Zeng_qc

(1.27*NP+0.5)±0.35

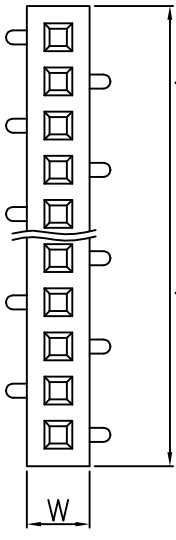


- Specifications
1. Current Ratings: 1Amps
 2. Insulation Resistance: 1000 MΩ min.
 3. Dielectric withstanding Voltage: AC 500V
 4. Contact Resistance: 30 mΩ max.
 5. Operating Temperature: -25°C to +85°C
 6. Contact Material: Brass
 7. Insulation Material: Asfollows
 8. Plated: Asfollows

Ordering Information

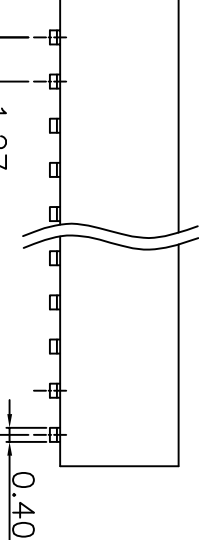

(1.27*NP-1.27)±0.15

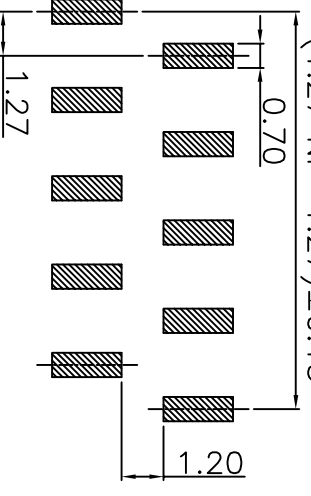

PCB LAYOUT



东莞市铷高电子制品有限公司

公差尺寸	公差标准	角度	度
0.0	±0.25	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

品名	PH1.27*4 13NP SMT U型单排母	制图	12.08.08
料号		审核	
文件编号		核准	
比例	1:1	单位	mm
		核	页码
			1/2
			尺码
			A4