
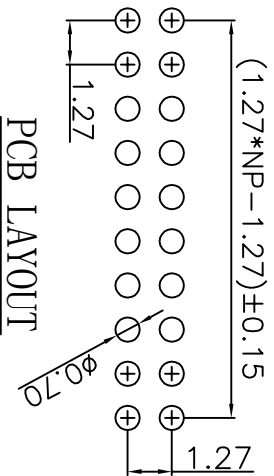

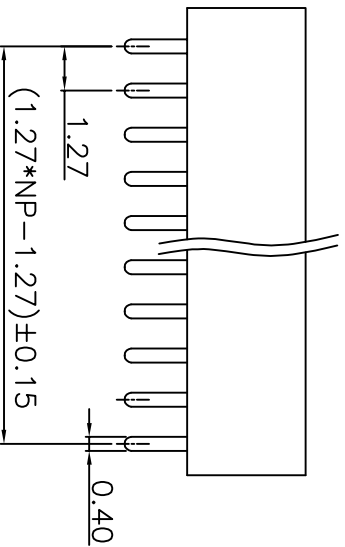


版本号	变更	说明	日期	签名
A	NEW		12.08.08	Zeng_qc

Specifications

1. Current Ratings: 1Amps
2. Insulation Resistance: 1000 M Ω min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 m Ω max.
5. Operating Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
6. Contact Material: Brass
7. Insulation Material: Asfollows
8. Plated: Asfollows

Ordering Information

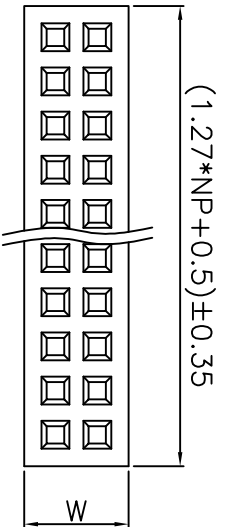

PCB LAYOUT



东莞市铀高电子有限公司

末标公差	尺寸	公差	角度	标准	度
.0	±0.25	0.°	±3°		
.00	±0.20	.0°	±2°		
.000	±0.10	.00°	±1°		

品名	PHI: 27*H 2*NP 180° U型双排非母	制图	12.08.08
料号		审核	
文件编号		核准	
比例	1:1	单位	mm
		页码	1/1
		尺码	A4