
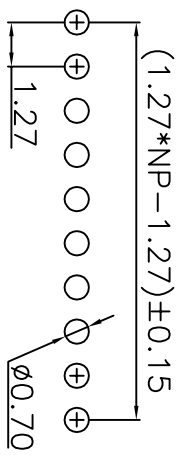

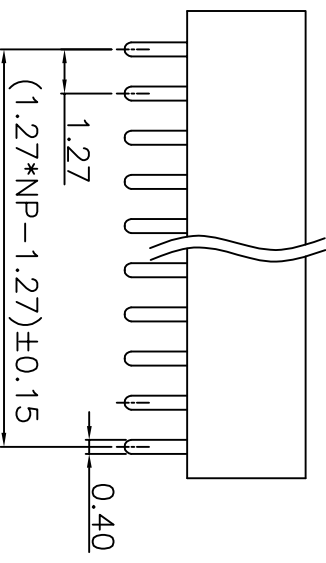


版本	变更	说明	日期	签名
A	NEW		12.08.08	Zeng_qc

Specifications

1. Current Ratings: 1Amps
2. Insulation Resistance: 1000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: Asfollows
8. Plated: Asfollows

Ordering Information

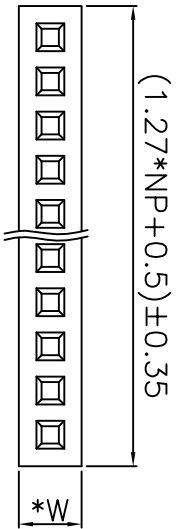

PCB LAYOUT



东莞市铀高电子有限公司

公差	尺寸	公差	角度	公差	角度
0.00	±0.25	0.°	±3°	0.00	±0.10
0.00	±0.20	0.°	±2°	0.00	±0.10
0.000	±0.10	0.00°	±1°		

品名	PHI: 27*H 1*NP 180° U型单排非母	制图	Zeng_qc	日期	12.08.08
料号		审核			
文件编号		核准			
比例	1:1	单位	mm	页码	1/2
				尺码	A4