

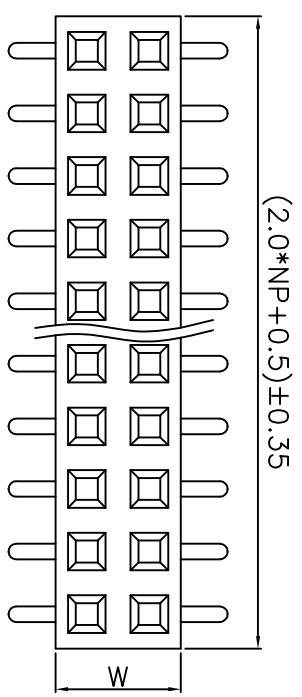
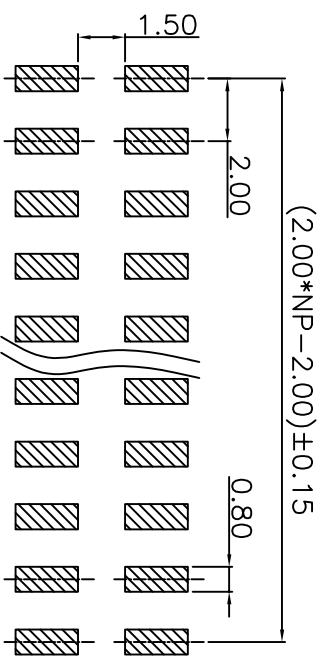


版本号	变更	说明	日期	签名
A	NEW		12.08.08	Zeng_qc



- Specifications
- Current Ratings: 1Amps
  - Insulation Resistance: 1000 MΩ min.
  - Dielectric withstanding Voltage: AC 500V
  - Contact Resistance: 30 mΩ max.
  - Operating Temperature: -25°C to +85°C
  - Contact Material: Brass
  - Insulation Material: Asfollows
  - Plated: Asfollows

### Ordering Information

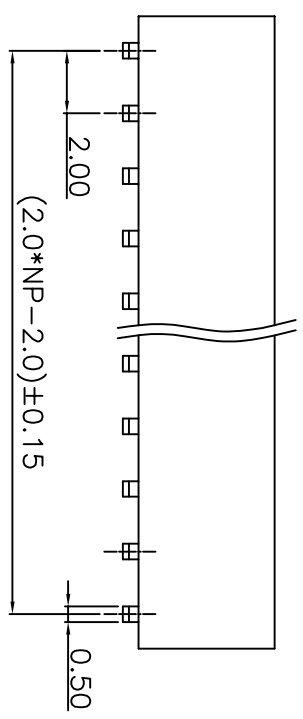

### PCB LAYOUT



### 东莞市铷高电子有限公司

公差标准	尺寸	角度	公差标准
±0.25	±3°	±0.25	±0.25
±0.20	±2°	±0.20	±0.20
±0.10	±1°	±0.10	±0.10

品名		PH2.00*H 2*NP SMT U型双排排母		制	图	Zeng_qc	12.08.08
料号				审	核		
文件编号				核	准		
比例	1:1	单位	mm	核	准	页码	1/2
						尺	寸
						码	A4