
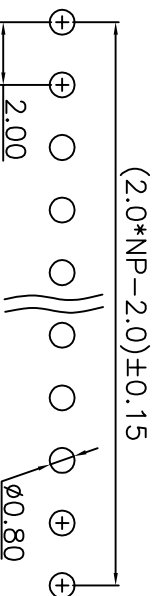

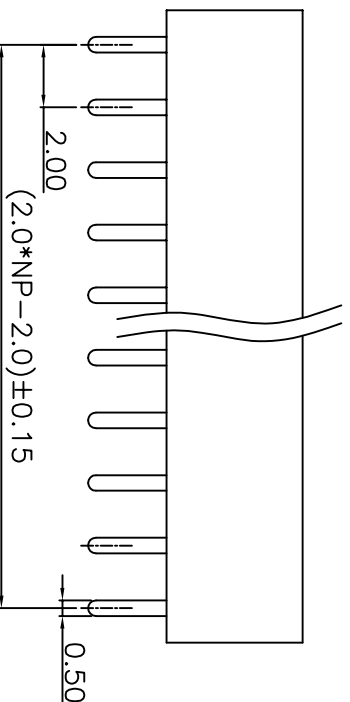


版本号	变更说明	日期	签名
A	NEW	12.08.08	Zeng_qc

Specifications

- Current Ratings: 1Amps
- Insulation Resistance: 1000 M Ω min.
- Dielectric withstanding Voltage: AC 500V
- Contact Resistance: 30 m Ω max.
- Operating Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
- Contact Material: Brass
- Insulation Material: Asfollows
- Plated: Asfollows

Ordering Information

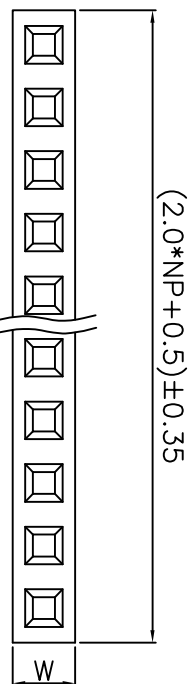

PCB LAYOUT



东莞市铷高电子有限公司

公差	尺寸	公差	角度	公差	尺寸	公差	角度
±0.25	±0.25	±0.25	±3 $^{\circ}$	±0.25	±0.25	±0.25	±3 $^{\circ}$
±0.20	±0.20	±0.20	±2 $^{\circ}$	±0.20	±0.20	±0.20	±2 $^{\circ}$
±0.10	±0.10	±0.10	±1 $^{\circ}$	±0.10	±0.10	±0.10	±1 $^{\circ}$

品名	PH2.00*H 1*NP 180 $^{\circ}$ U型单排排母	制图	12.08.08
料号		审核	
文件编号		核准	
比例	1:1	单位	mm
		页码	2/2
		尺碼	A4