


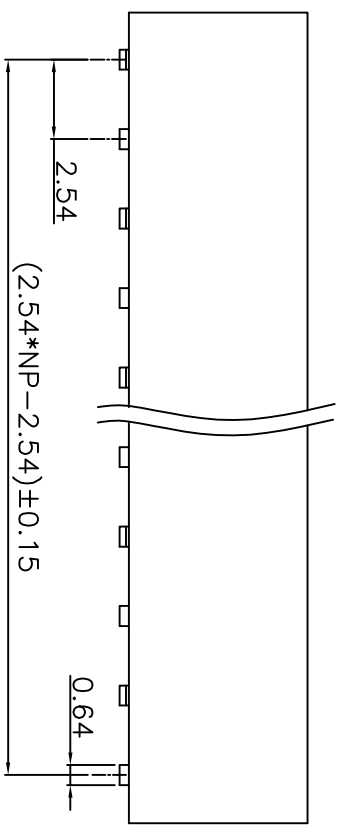


版本	变更	说明	日期	签名
A	NEW		12.08.08	Zeng_qc

(2.54*NP+0.5)±0.35

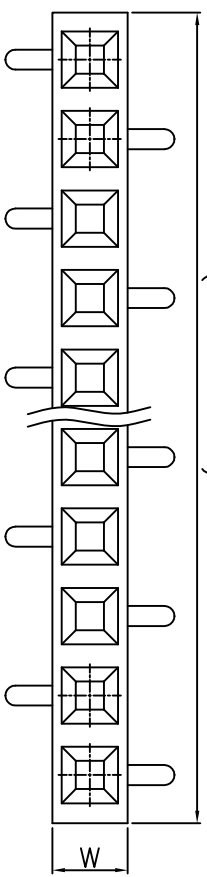

(2.54*NP-2.54)±0.15

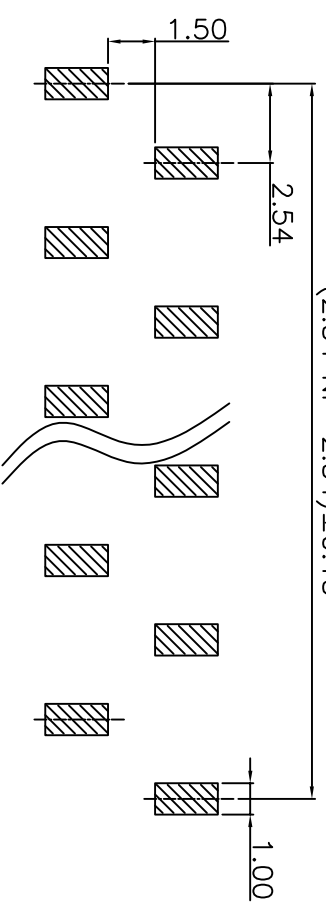

PCB LAYOUT

- Specifications
- Current Rating: 1Amps
 - Insulation Resistance: 1000 MΩ min.
 - Dielectric withstanding Voltage: AC 500V
 - Contact Resistance: 30 mΩ max.
 - Operating Temperature: -25°C to +85°C
 - Contact Material: Brass
 - Insulation Material: Asfollows
 - Plated: Asfollows
- Ordering Information



东莞市铨高电子有限公司

公差尺寸	公差标准	角度	度
0	±0.25	0°	±3°
.00	±0.20	0°	±2°
.000	±0.10	.00°	±1°

东莞市铨高电子有限公司				
品名	PH2.54*H1.1*NP-SMT U型单排非母	制图		12.08.08
料号		审核		
文件编号		核准		
比例	1:1	单位	mm	
		核	页码	1/2
			尺	码 A4