
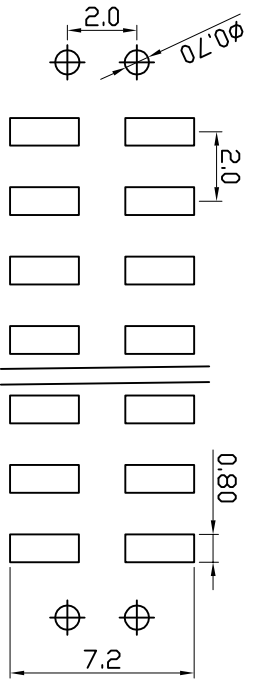
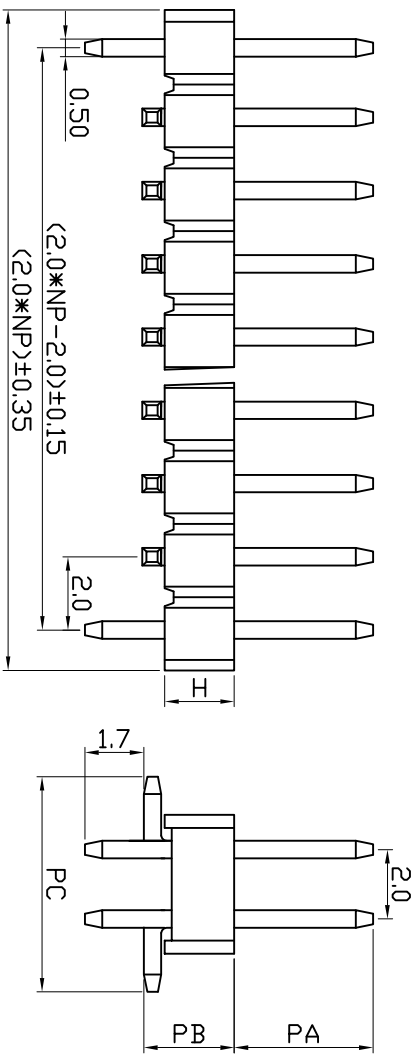


|           |                |                 |                     |            |               |
|-----------|----------------|-----------------|---------------------|------------|---------------|
| 版本<br>REV | 编号<br>ECON NO. | 位置<br>LOCATIONS | 变更内容<br>DESCRIPTION | 日期<br>DATE | 变更人<br>DESIGN |
| A0        |                |                 |                     |            |               |

### Specifications

1. Current Rating: 1Amps
2. Insulation Resistance: 1000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

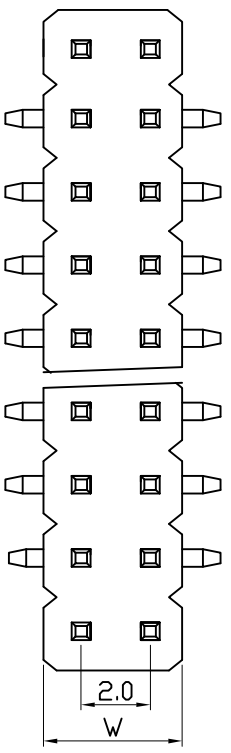

### Ordering Information



东莞市铷高电子有限公司

|                                      |        |                                   |                  |               |                        |
|--------------------------------------|--------|-----------------------------------|------------------|---------------|------------------------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |        | 品名<br>TITLE: PH2.0PH 180° SMT双排排针 |                  | 制图<br>(DN):   | 日期<br>(Date): 09.08.19 |
| LINER                                | ANGLES | 料号<br>(P/N):                      | 审核<br>(CHKD):    | 日期<br>(Date): |                        |
| 0.0 ±0.3                             | 0.°    | 模子<br>(M/N):                      | 核准<br>(APPD):    | 日期<br>(Date): |                        |
| .00 ±0.2                             | .0°    | 比例<br>(SCALE):                    | 单位<br>(UNIT): mm | 数量<br>(QTY):  | 规格<br>(TYPE):          |
| .000 ±0.1                            | .00°   | 1:1                               | 1:1              | 数量<br>(QTY):  | 规格<br>(TYPE):          |