


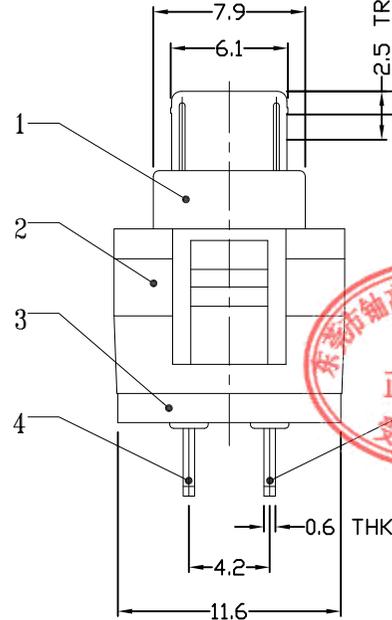


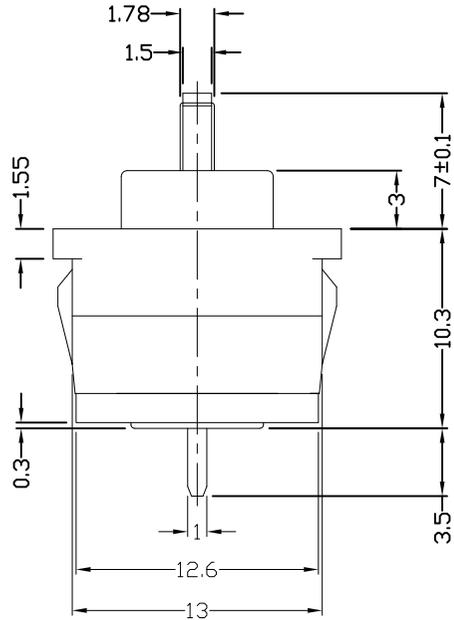

RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

### DIMENSIONS

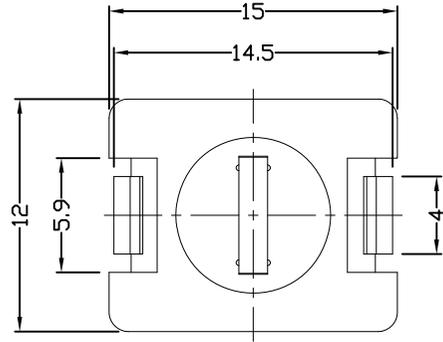

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A
CIRCUIT	1P1T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	
OPERATING MODE	NON-LOCK
STROKE	FULL 2.5mm ON 1.2 <sup>+0.5</sup> <sub>-0.2</sub> mm
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000



8					
7	SPRING	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm
6	CONTACT	SUS	1	Ag<0.5μm>PLATED	OVER 1.5mm: ±0.2mm
5	U-TERMINAL	BRASS STRIP	1	Ag<0.5μm> PLATED OVER Ni PLATED	
4	V-TERMINAL	BRASS STRIP	1	Ag<0.5μm> PLATED OVER Ni PLATED	
3	CASE	NYLON+F.G	1	BLACK	
2	COVER	PC	1	BLACK	
1	KNDB	PDM	1	WHITE	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

<b>东莞市铀高电子制品有限公司</b>			
TITLE: PUSH SWITCH / VERTICAL		PART NO.: AP-11E01N	
DR: <i>Ricky</i> 2015/03/19		DWG NO.: ADJ-11E01	
CHKD: <i>Ricky</i> 2015/03/19		SCALE	SHEET
APPD:		5:2	1/1
		REV.	CUSTOMER
		A	DRAWING