


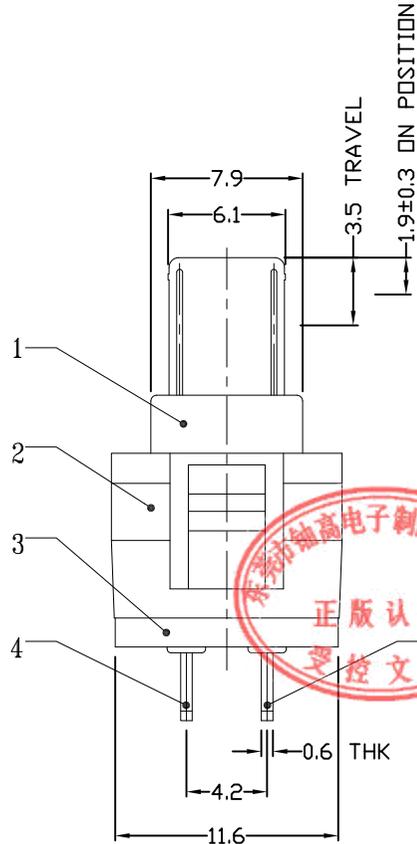


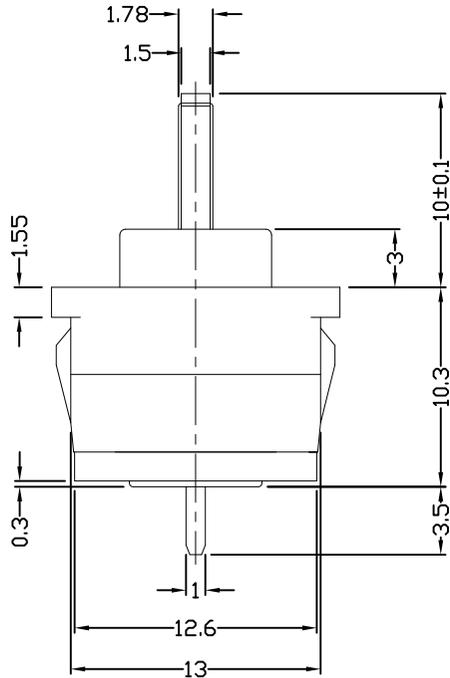

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

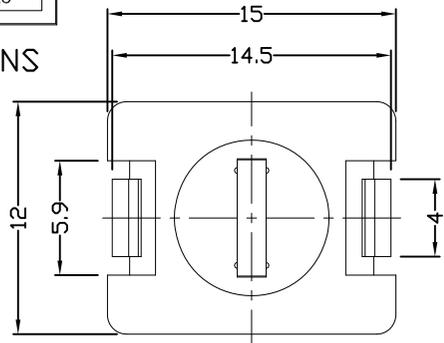

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A
CIRCUIT	1P1T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	
OPERATING MODE	NON-LOCK
STROKE	FULL 3.5mm ON 1.9±0.3
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000



8															
7	SPRING	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS mm	<p align="center">东莞市铀高电子制品有限公司</p> <p>TITLE: PUSH SWITCH / VERTICAL PART NO.: AP-11E02N</p> <p>DR: <i>Ricky</i> 2015/03/19 DWG NO.: ADJ-11E02</p> <p>CHKD: <i>Ricky</i> 2015/03/19</p> <p>APPD:</p> <table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> <td>CUSTOMER</td> </tr> <tr> <td>5:2</td> <td>1/1</td> <td>A</td> <td>DRAWING</td> </tr> </table>	SCALE	SHEET	REV.	CUSTOMER	5:2	1/1	A	DRAWING
SCALE	SHEET	REV.	CUSTOMER												
5:2	1/1	A	DRAWING												
6	CONTACT	SUS	1	Ag<0.5μm>PLATED	OVER 1.5mm: ±0.2mm	MAT'L									
5	U-TERMINAL	BRASS STRIP	1	Ag<0.5μm> PLATED OVER Ni PLATED		SEE NOTE									
4	V-TERMINAL	BRASS STRIP	1	Ag<0.5μm> PLATED OVER Ni PLATED		SEE NOTE									
3	CASE	NYLON+F.G	1	BLACK		FINISH									
2	COVER	PC	1	BLACK		SEE NOTE									
1	KNDB	PDM	1	WHITE		Q'TY									
NO.	PARTS	MATERIAL	Q'TY	FINISHING											

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

