

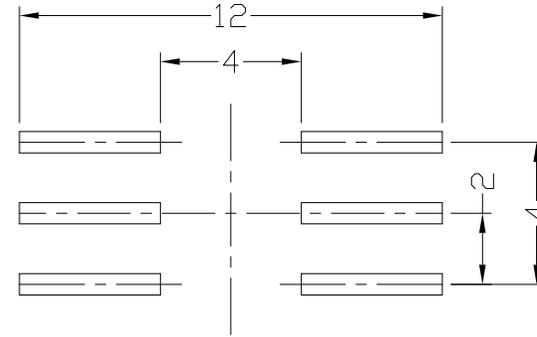


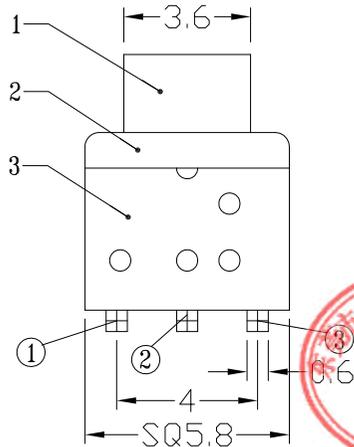


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

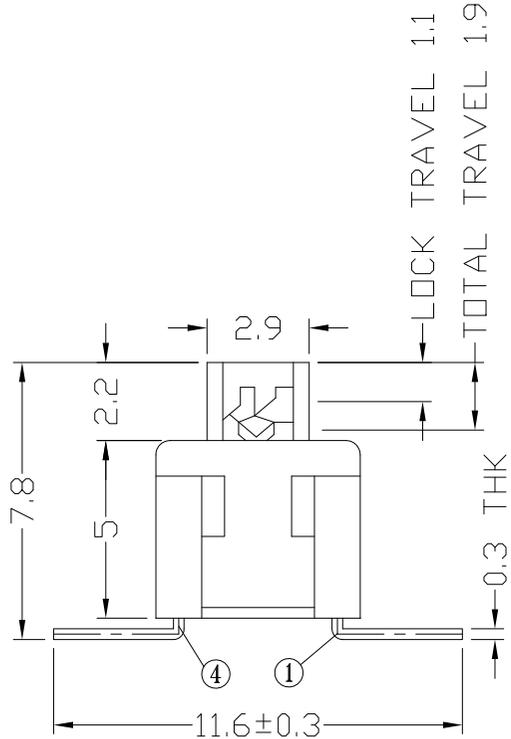

P.C.B LAYOUT



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216SFL
	NON-LOCK	AP-2216SFN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	150±50gf	250±100gf
OPERATING LIFE(cycles)	10,000	



NO	PARTS	MATERIAL	QTY	FINISHING	
6					WITHIN 1.5mm: ±0.1mm
5	CAM STICK	SUS	1	NATURAL	OVER 1.5mm: ±0.2mm
4	SPRING	SUS	1	NATURAL	
3	CASE	NYLON+F.G/BRASS STRIP	1	GREY/Ag PLATED OVER Ni PLATED	
2	COVER	POM	1	BLACK	
1	KNOB	POM/PBS C5210R-EH	1	WHITE/Ag CLAD	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	东莞市铀高电子制品有限公司			
mm	TITLE: PUSH SWITCH / VERTICAL		PART NO.: AP-2216SFL & AP-2216SFN	
MAT'L	DR: Ricky 2015/03/25		DWG NO.: ADJ-2216SF	
SEE NOTE	CHKD: Ricky 2015/03/25		SCALE	SHEET
FINISH	APPD:		5:1	1/1
SEE NOTE			REV.	A
Q'TY			CUSTOMER DRAWING	

