

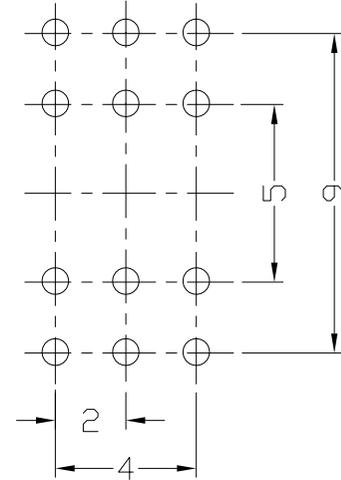


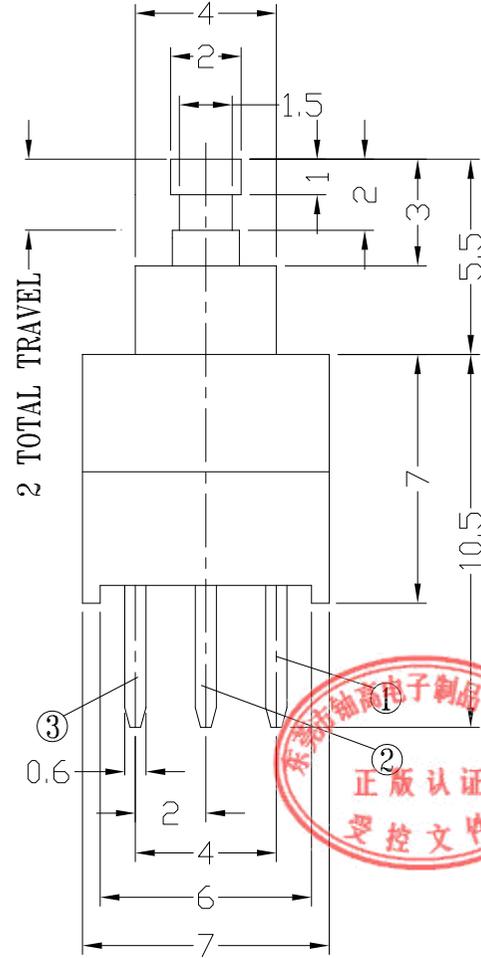


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

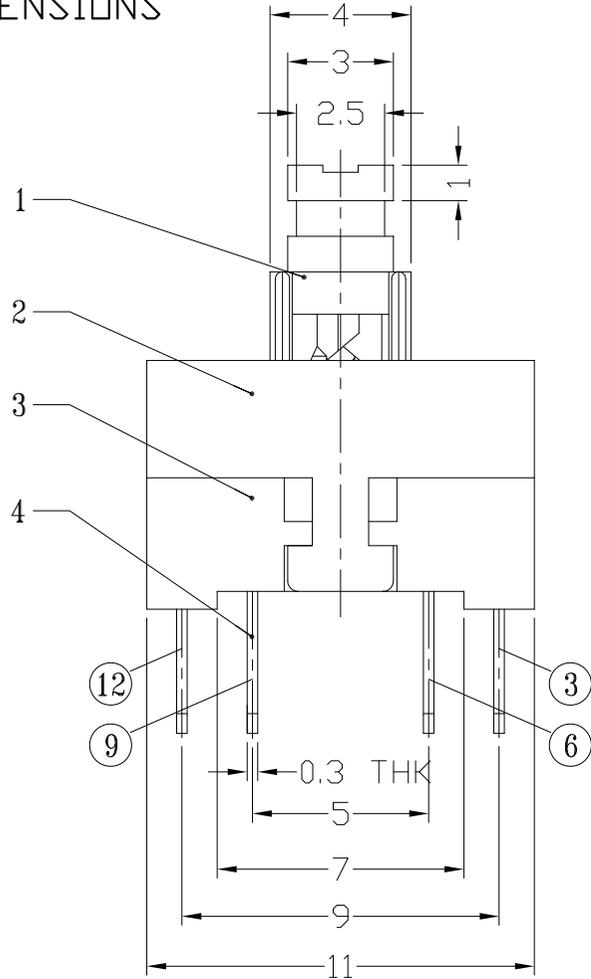

P.C.B LAYOUT



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A
CIRCUIT	4P2T
CONTACT RESISTANCE	70mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 2.0mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



6	SPRING	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm
5	CONTACT CLIP	PBS C5210R-EH	4	Ag CLAD	OVER 1.5mm: ±0.2mm
4	TERMINAL	PBT/BRASS STRIP	4	BLACK/Ag PLATED OVER NI PLATED	
3	CASE	PA66	1	BLACK	
2	COVER	POM	1	BLACK	
1	KNOB	POM	1	WHITE	
NO	PARTS	MATERIAL	QTY	FINISHING	

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
Q'TY		PUSH SWITCH / VERTICAL	AP-4201N		
		DR: Ricky 2015/03/23	DWG NO.:		
		CHKD: Ricky 2015/03/23	ADJ-4201		
		APPD:	SCALE	SHEET	REV.
			4:1	1/1	A
			CUSTOMER DRAWING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.