


ROHS

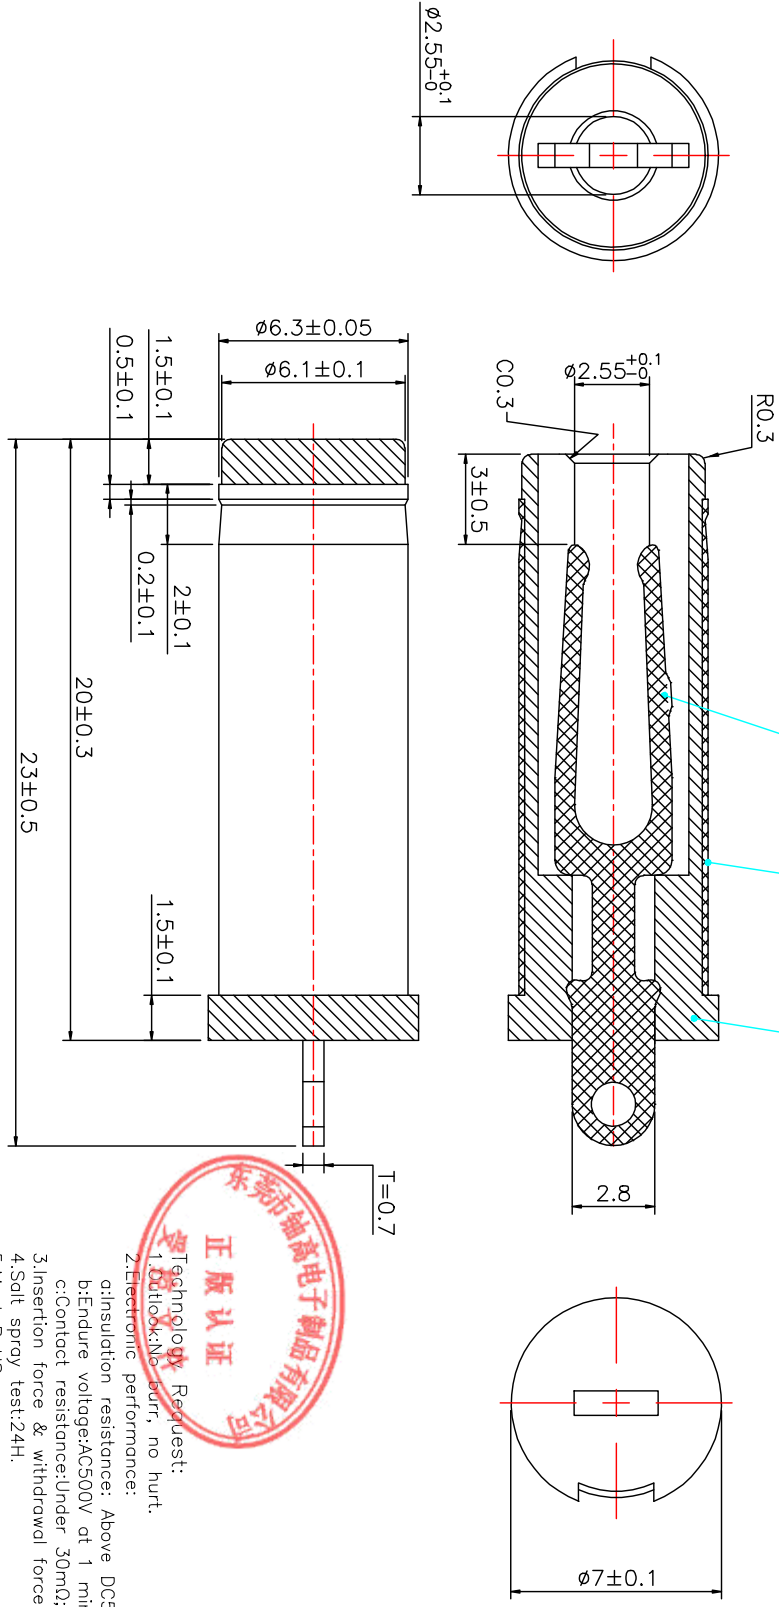

Technology Request:
 1. Daitlock: No burr, no hurt.
 Z: Electronic performance:
 a: Insulation resistance: Above DC500V/100MΩ;
 b: Endure voltage: AC500V at 1 minute;
 c: Contact resistance: Under 30mΩ;
 3. Insertion force & withdrawal force: 0.3-3kgf.
 4. Salt spray test: 24h.
 5. Meet RoHS.
 6. Remark * is important specification.

REV	修正描述 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

单位 Unit	mm	一般公差 The general tolerance
比例 Scale	5:1	XX:±0.3
视图 Third angle projection		X:X:±0.1
		.XX:±0.05

NO.	1	PART	MATERIAL	PLATING
	2			
	3	5525*20 舌叉片	C5191	Ni 1-3um
	2	6.28*17 绝缘管	H65	Ni 1-3um
	1	PLASTIC	PBT	BLACK

批准 APPROVED BY	杨义邦	制图 DRAWN BY	李莹峰
检查 CHECKED BY			
日期 DATE	June		

规格 DESCRIPTION:	DC PLUG φ6.3*φ2.55*23
品名 P/N:	63255TV230
图号 DRAWN NO:	GP-01-0119