
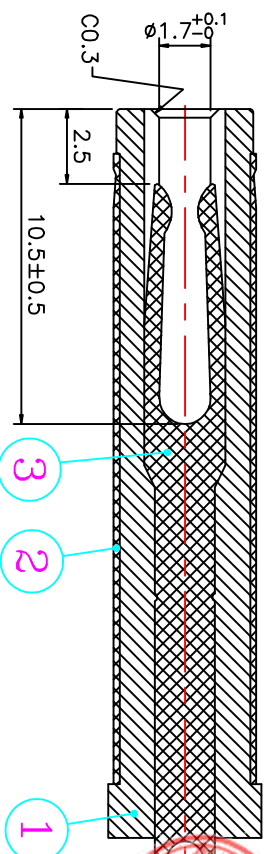
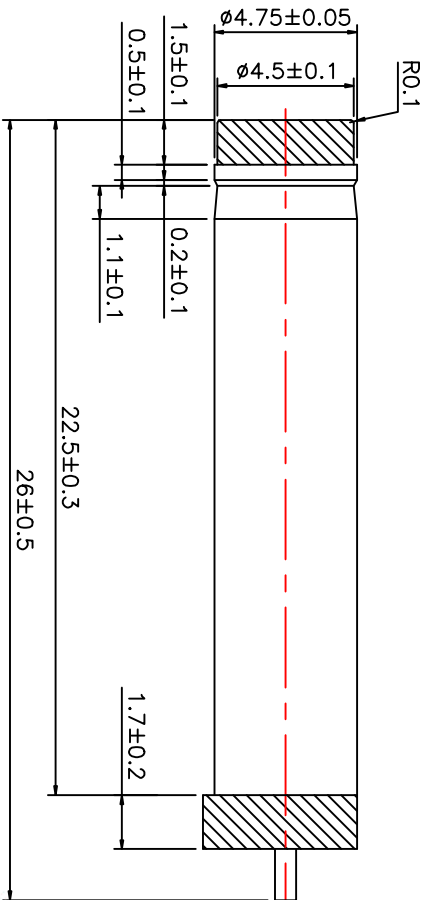


ROHS

REV	REV. ITR	BEFORE REVISION	AFTER REVISION	REV. SIGN	DATE
V1.0		新版制定		June	20200420



Technology Request:
 1. Out look: No ferr, no hurt.
 2. Dielectric performance:
 a: Insulation resistance: Above DC500V/100M Ω;
 b: Endure voltage: AC500V at 1 minute;
 c: Contact resistance: Under 30m Ω;
 3. Insertion force & withdrawal force: 0.3-3kgf.
 4. Salt spray test: 48H.
 5. Meet RoHS.
 6. Remark * is important specification.

Unit	一般公差 The general tolerance	7	核准 APPROVED BY	制图 DRAWN BY	规格 DESCRIPTION:
比例 Scale	XX:±0.3	5	June	李莹峰	DC PLUG 4.75*1.7*26
视图 Third angle projection	X.X:±0.1	3	杨义邦	李莹峰	品名 P/N: 47517V260
	.XX:±0.05	1			图号 DRAWN NO: CP-01-0174
		NO.			

1 2 3 4 5 6 7 8 9