
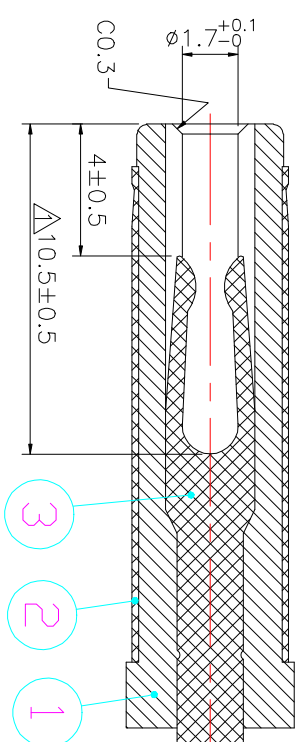

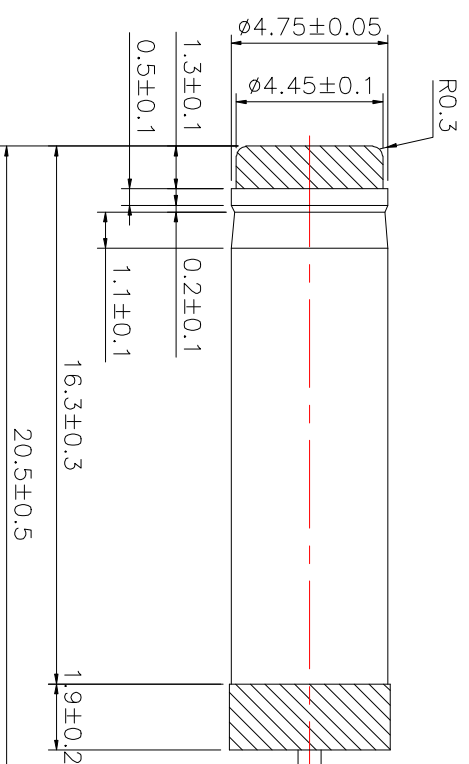


ROHS



Technology Request:
 1. Outlook: No burr, no hurt.
 2. Electronic performance:
 a. Insulation resistance: Above DC500V/100MΩ;
 b. Endure voltage: AC500V at 1 minute;
 c. Contact resistance: Under 30mΩ;
 3. Insertion force & withdrawal force: 0.3-3kgf.
 4. Salt spray test: 24h.
 5. Meet RoHS.
 6. Remark * is important specification.

REV	REV. DATE	REV. REASON	REV. SIGN	REV. DATE
V1.0	June	新板制定	June	20180901
V1.1	June		June	20190610

单位	一般公差
mm	The general tolerance
比例	Scale
5:1	XX:±0.3
视图	Third angle projection
	X:X:±0.1
	.XX:±0.05

NO.	APPROVED BY	CHECKED BY	DRAWN BY
1	June	杨义邦	李莹峰
2			
3			
4			

NO.	MATERIAL	PLATING
1	47517黄铜片	Ni 2um-5um
2	4.75黄铜管	Ni 2um-5um
3	PLASTIC	BLACK
4	PART	

规格	DESCRIPTION:
品名	DC PLUG $\phi 4.75 \times \phi 1.7 \times 20.5$
图号	47517TV/205M40
图号	CP-01-0077

东莞市铷高电子有限公司