

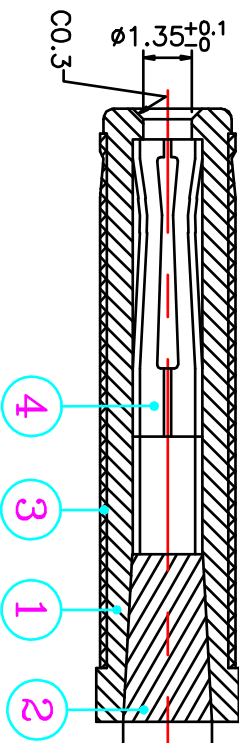


ROHS

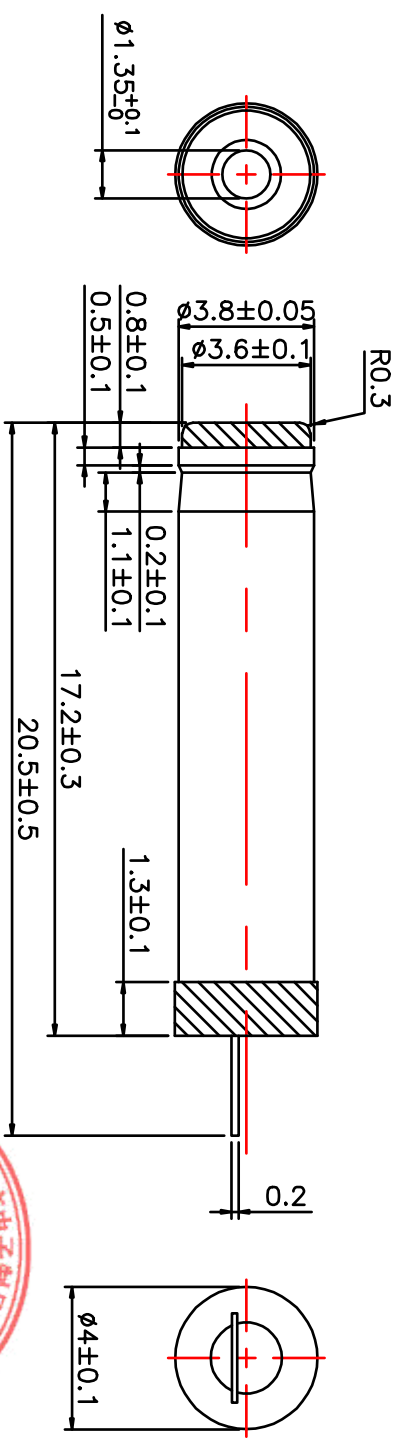

Technology Request:
 1.Outlook: No burr, no hurt.
 2.Electronic performance:
 a:insulation resistance:
 Above DC500V/100MΩ;
 b:Endure voltage:
 AC500V at 1 minute;
 c:Contact resistance:
 Under 30mΩ;
 3.Insertion force & withdrawal force:
 0.3-3kgf.
 4.Salt spray test:24H.
 5.Meet RoHS.
 6.Remark * is important specification.

REV	REV/LTR	BEFORE REVISION	AFTER REVISION	SIGN	DATE
V1.0		初版制定		June	20180917

单位 Unit	mm
比例 Scale	5:1
第三角 Third angle projection	X.X:±0.1 .XX:±0.05
公差 The general tolerance	XX:±0.3

NO.	1	2	3	4	5	6	7
MATERIAL	PART	PLASTIC	PLASTIC	POM	PLATING	BRONZE(C5191)	BRASS(H65)
						NI 40~120μ	NI 40~120μ

批准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰

规格 DESCRIPTION:	名称 P/N:	图号 DRAWN NO:
DC PLUG 3.8*1.35*20	38135TV200	CP-01-0058

东莞市铨高电子有限公司

1 2 3 4 5 6 7 8 9