


ROHS

REV	REVISED	BEFORE REVISION	AFTER REVISION	DATE
V1.0	初版制定			June 20190105

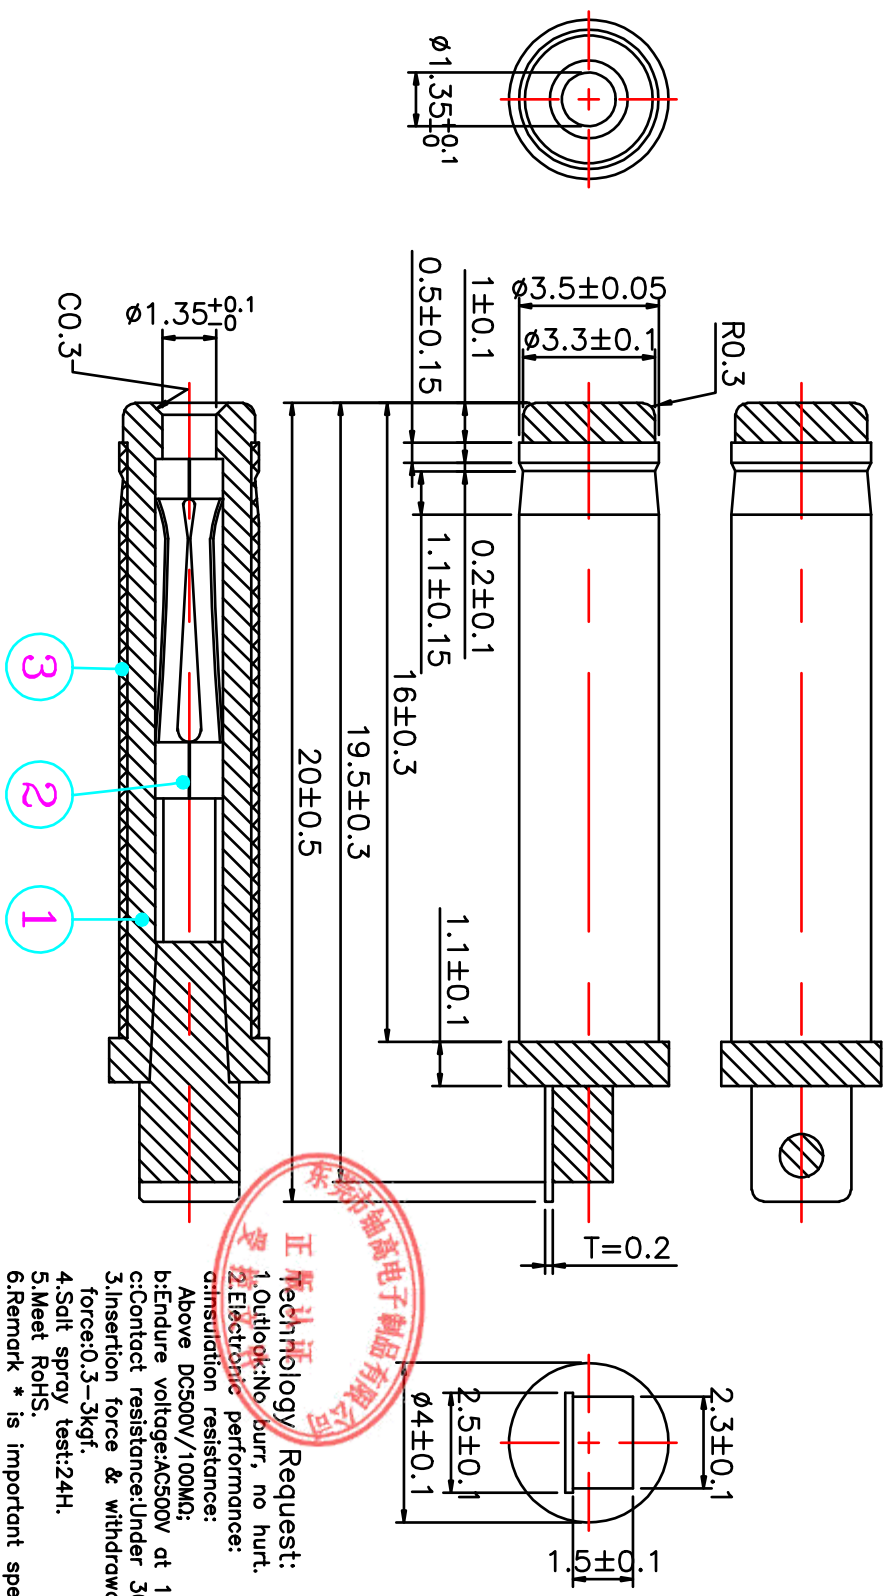

Request:
 1.Outlook:No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance:
 Above DC500V/100MΩ;
 b:Endure voltage:AC500V at 1 minute;
 c:Contact resistance:Under 30mΩ;
 3.Insertion force & withdrawal
 force:0.3-3kgf.
 4.Salt spray test:24H.
 5.Meet RoHS.
 6.Remark * is important specification.

Unit	mm	公差	一般公差
比例	5:1	XX:±0.3	The general tolerance
第三角制	X:X:±0.1	XX:±0.3	
第三角制	.XX:±0.05	XX:±0.3	

NO.	NO.	NO.	NO.	NO.	NO.	NO.	NO.	NO.
1	2	3	4	5	6	7	8	9
PLASTIC	PART	MATERIAL	PLATING	PLASTIC	PART	MATERIAL	PLATING	PLASTIC
C5191	PBT	C5191	BLACK	H65	Ni 1~3um	H65	Ni 1~3um	H65
PLASTIC	PART	MATERIAL	PLATING	PLASTIC	PART	MATERIAL	PLATING	PLASTIC
PLASTIC	PART	MATERIAL	PLATING	PLASTIC	PART	MATERIAL	PLATING	PLASTIC

批准	校对	制图	审核
June	杨义邦	李雪峰	李雪峰

规格	DESCRIPTION:
3.5 DC PLUG Ø3.5*1.35*20	

图号	DRAWN NO:
CP-01-0055	

东莞市铰高电子有限公司

