
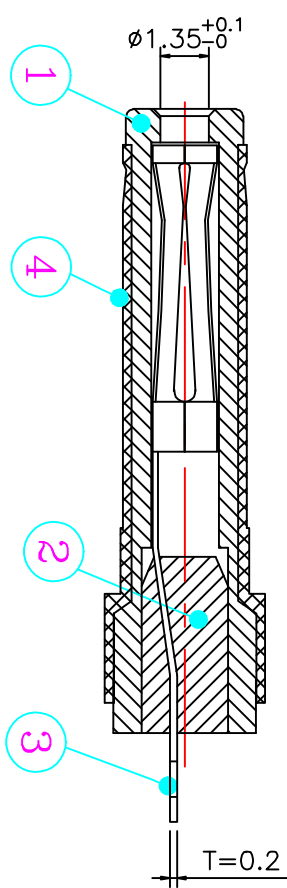

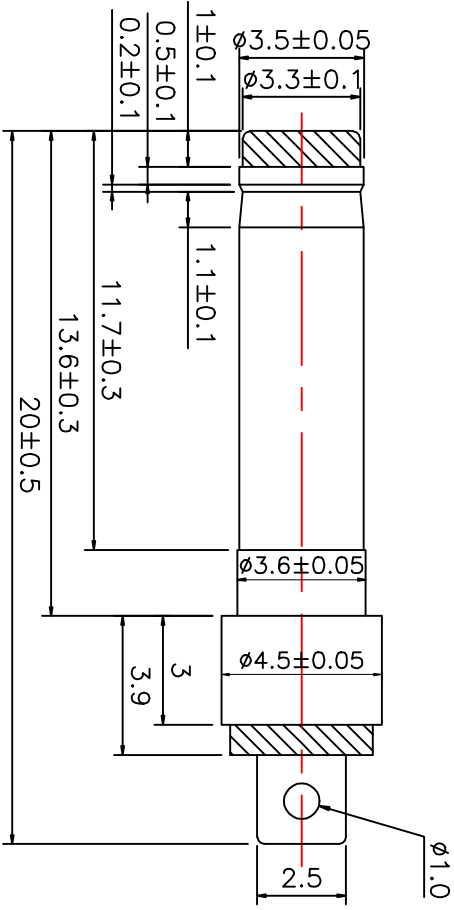


ROHS

REV	修正类型 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	修 订 人 SIGN	日 期 DATE
V1.0		新威制定		June	20180917
V2.0	△	PLUG	PLUG	June	20200622



Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:insulation resistance:
Above DC500V/100MQ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:
3N-30N.
4.Salt spray test:48H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	一般公差 The general tolerance
比例 Scale	XX:±0.3
视图 Third angle projection	X.X:±0.1
	.XX:±0.05

7		核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
6				
5	4.5*15.6外管			
4	3613072028端子	C3604		
3		C5191		
2	PLASTIC	POM		
1	PLASTIC	PA66		
NO.	PART	MATERIAL		

规格 DESCRIPTION:	品名 P/N:	图号 DRAWN NO:
3.5 DC PLUG $\phi 3.5*1.35*20$	35135TV200C	CP-01-0054

东莞市铨高电子有限公司