



ROHS

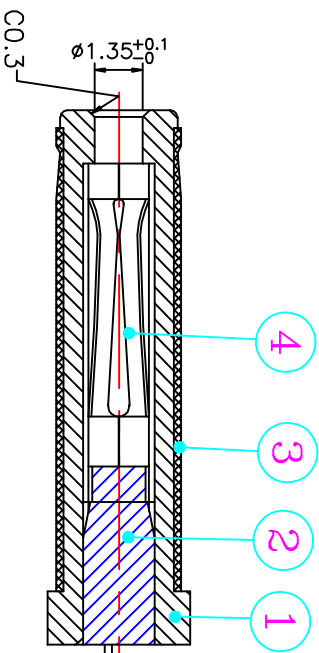

0.2±0.03

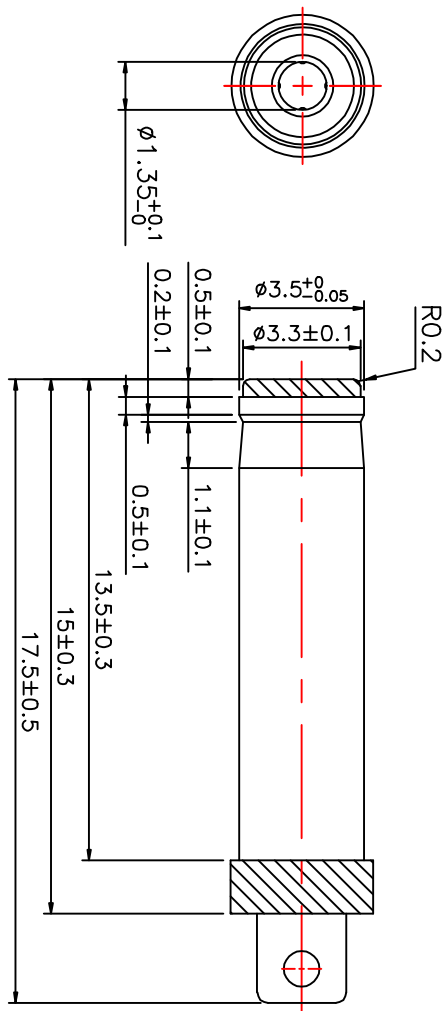

**Technology Request:**  
 1.Outlook:No burr, no hurt.  
 2.Electronic performance:  
 a:insulation resistance:  
 Above DC500V/100MΩ;  
 b:Endure voltage:AC500V at 1 minute;  
 c:Contact resistance:Under 30mΩ;  
 3.Insertion force & withdrawal force:0.3-3kgf.  
 4.Salt spray test:24H.  
 5.Meet RoHS.  
 6.Remark \* is important specification.

REV	修正描述 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签字 SIGN	日期 DATE
V1.0		新版制定		June	20180917

比例	公差
5:1	XX:±0.3
第三角投影	X:X:±0.1
	.XX:±0.05

NO.	材料	材料
1	PLASTIC	POM
2	PLASTIC	BLACK
3	3.48*1.3*0.16棒状管	Sn 1~3um
4	35135*15.8*0.2连接器端子	NI 1~3um
5		H65
6		C5191
7		

核准	校对	制图
APPROVED BY	CHECKED BY	DRAWN BY
June	杨义邦	李莹峰

规格	描述
DC PLUG 03.5*1.35*17.5	
品名	P/N:
图号	DRAWN NO:
	35135TV175
	CP-01-0047

东莞市铨高电子有限公司

1 2 3 4 5 6 7 8 9