

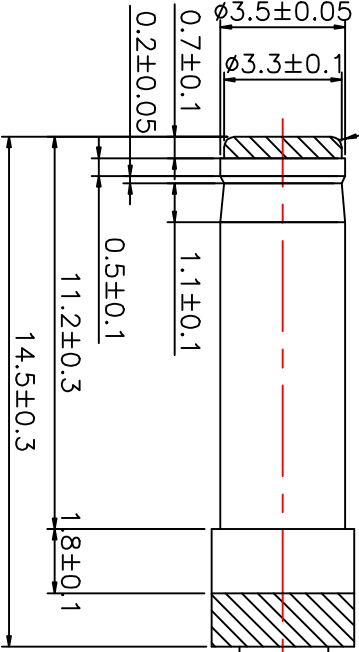


ROHS

| REV  | 修正类型<br>REV/LTR | 修正前<br>BEFORE REVISION | 修正后<br>AFTER REVISION | 修<br>订<br>日<br>期<br>DATE |
|------|-----------------|------------------------|-----------------------|--------------------------|
| V1.0 |                 | 新板制定                   |                       | June<br>20180917         |

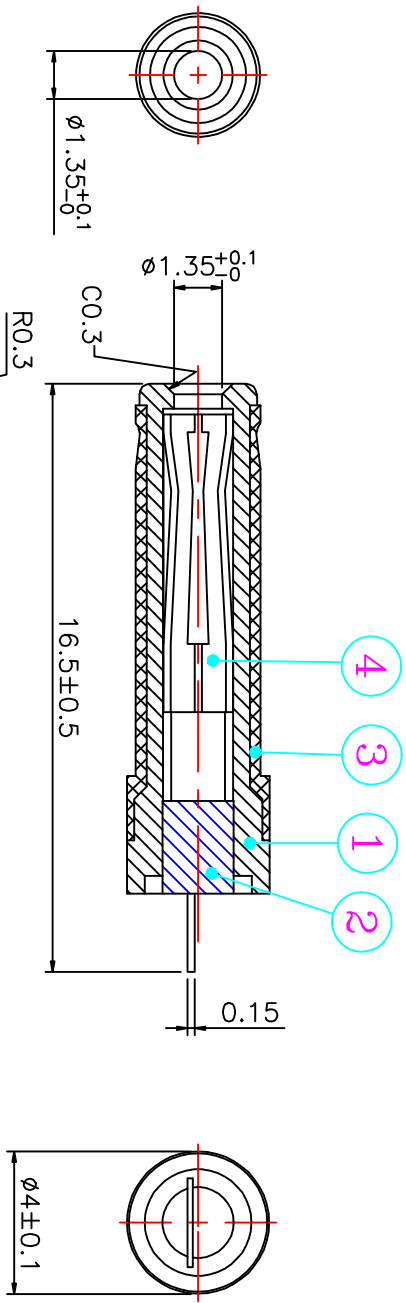

Request:  
1.Outlook:No burr, no hurt.  
2.Electronic performance:  
dissipation resistance:  
Above DC500V/100mA;  
b:Endure voltage:AC500V at 1 minute;  
c:Contact resistance:Under 30mΩ;  
3.Insertion force & withdrawal  
force:0.3-3kgf.  
4.Salt spray test:48H.  
5.Meet RoHS.  
6.Remark \* is important specification.

| 比例<br>Scale                      | 公差<br>Tolerance |
|----------------------------------|-----------------|
| 5:1                              | XX:±0.3         |
| 第三角<br>Third angle<br>projection | X.X:±0.1        |
|                                  | .XX:±0.05       |

| 材料<br>Unit                       | 材料<br>The general | 核准<br>APPROVED BY | 校对<br>CHECKED BY | 制图<br>DRAWN BY |
|----------------------------------|-------------------|-------------------|------------------|----------------|
| 5:1                              | XX:±0.3           | June              | 杨义邦              | 李莹峰            |
| 第三角<br>Third angle<br>projection | X.X:±0.1          |                   |                  |                |
|                                  | .XX:±0.05         |                   |                  |                |

| 规格<br>DESCRIPTION:     | 品名<br>P/N: | 图号<br>DRAWN NO: |
|------------------------|------------|-----------------|
| DC PLUG Ø3.5*1.35*16.5 | 35135TV165 | CP-01-0046      |

东莞市铨高电子有限公司