
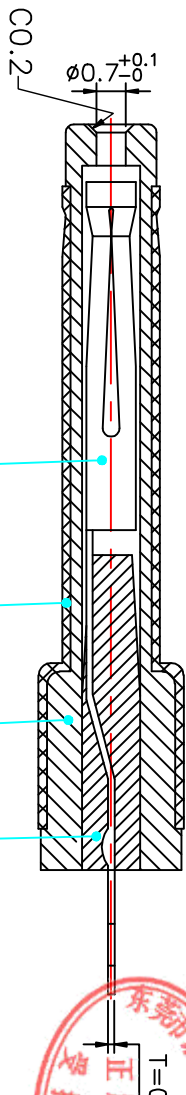


ROHS

版本 REV	修正标记 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

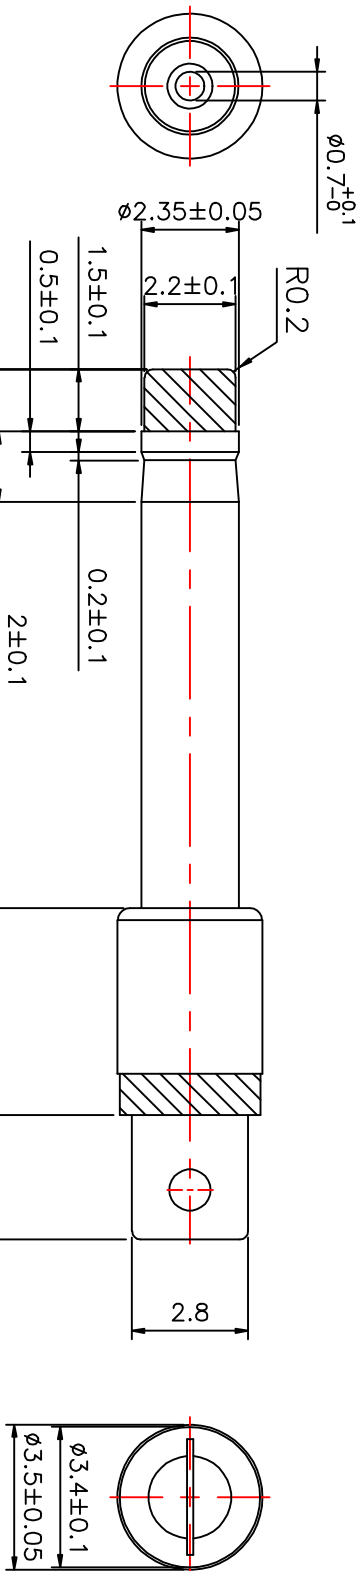

Technology Request:

1.Outlook: No burr, no hurt.

2.Electronic performance:

a:Insulation resistance: Above DC500V/100MQ;

b:Endure voltage: AC500V at 1 minute;

c:Contact resistance: Under 30mΩ;

3.Insertion force & withdrawal force: 0.3~3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

东莞市铀高电子有限公司

单位 Unit	mm	一般公差 The general tolerance	7	8	9
比例 Scale	5:1	xx.:±0.3	5	6	7
视图 Third angle projection	X.X:±0.1	xx.:±0.05	1	2	3
NO.	1	PLASTIC	POM	BLACK	PLATING
NO.	2	PART	MATERIAL	PLATING	BLACK
NO.	3	BRASS(C3604)	NI 40~120μ	June	杨义邦
NO.	4	2207-41连接器	BRONZE(C5191)	李莹峰	图号
NO.	5	3.5*15.5*2.37车轴管	BRASS(C3604)	品名	DC PLUG $\phi 2.35 \times \phi 0.7 \times 21$
NO.	6	PLASTIC	POM	图号	23507TV210C
NO.	7	PLASTIC	POM	图号	CP-01-0019
NO.	8	PLASTIC	POM	图号	CP-01-0019
NO.	9	PLASTIC	POM	图号	CP-01-0019