
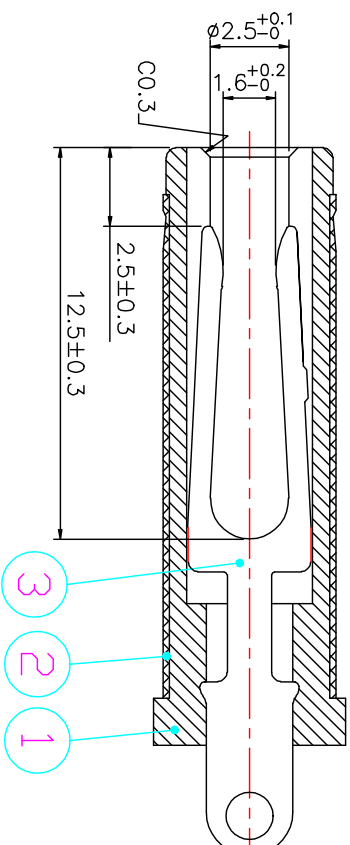

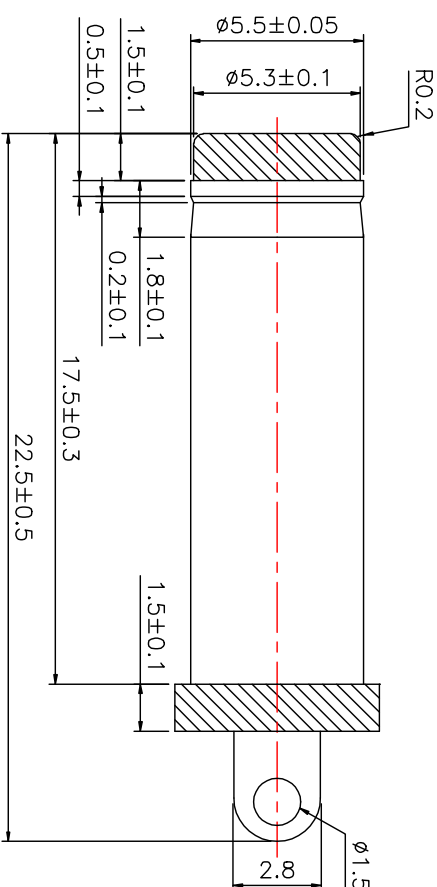


ROHS



1. Outlook No bur
2. Electronic perf

Technology Request:

1. Outlook: No burr, no hurt.
2. Electronic performance:

- a.insulation resistance: Above DC500V/100MΩ;
- b.Endure voltage:AC500V at 1 min;
- c.Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3-3kgf.
- 4.Salt spray test:24h.
- 5.Meet RoHS.
- 6.Remark * is important specification.

		7		8		9	
原 本 REV	修正 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	姓 名 SIGN	日 期 DATE		
V1.0		新板制定		June	20180917		

东莞市铨高电子制品有限公司																	
单位 Unit		mm		一般公差 The general Tolerance		7	核准 APPROVED BY		校对 CHECKED BY		制图 DRAWN BY		规格 DESCRIPTION:		DC PLUG Ø5.5*Ø2.5*22.5		
比例 Scale		5:1		XX.:±0.3		5			杨义邦		李莹峰		品名 P/N:		5525TV225M25		
视图 Third angle projection		X.X:±0.1		3		5525*20音叉片											
		.XX:±0.05		2		5.48*16穿接管								图号 DRAWN NO:		CP-01-0111	
				1		PLASTIC											
				PART		MATERIAL											
1		2		3		4		5		6		7		8		9	