
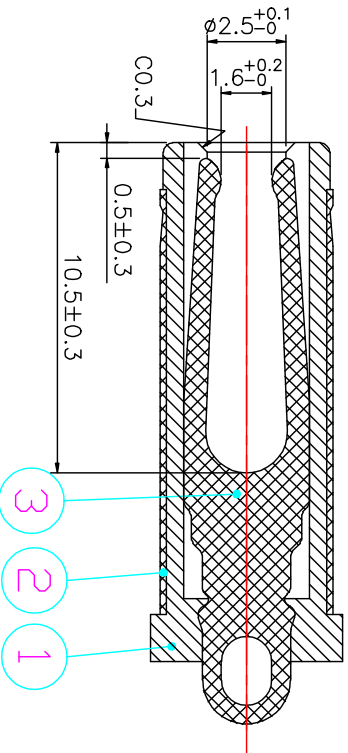


ROHS

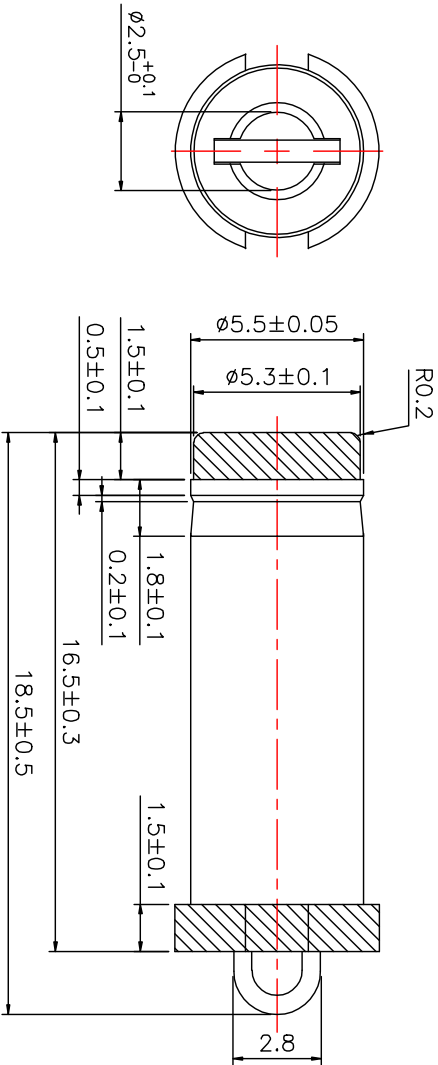

- Request:  
1.Outlook:No burr, no hurt.  
2.Electronic performance:  
a:Insulation resistance: Above DC500V/100MΩ;  
b:Endure voltage:AC500V at 1 minute;  
c:Contact resistance:Under 30mΩ;  
3.Insertion force & withdrawal force:0.3~3kgf.  
4.Salt spray test:24H.  
5.Meet RoHS.  
6.Remark \* is important specification.

| 版本<br>REV | 修正标记<br>REVLIR | 修正前<br>BEFORE REVISION | 修正后<br>AFTER REVISION | 签名<br>SIGN | 日期<br>DATE |
|-----------|----------------|------------------------|-----------------------|------------|------------|
| V1.0      |                | 新版制定                   |                       | June       | 20180917   |
|           |                |                        |                       |            |            |

东莞市铷高电子有限公司

| 单位<br>Unit                   | 一般公差<br>The General Tolerance | 7        |
|------------------------------|-------------------------------|----------|
| mm                           | XX:±0.3                       | 6        |
| 比例<br>Scale                  | XX:±0.1                       | 5        |
| 视图<br>Third angle projection | X:X:±0.1                      | 4        |
|                              | .XX:±0.05                     | 3        |
|                              |                               | 2        |
|                              |                               | 1        |
|                              |                               | NO.      |
|                              |                               | PART     |
|                              |                               | MATERIAL |
|                              |                               | PLATING  |

| 核准<br>APPROVED BY | 校对<br>CHECKED BY | 制图<br>DRAWN BY |
|-------------------|------------------|----------------|
| June              | 杨义邦              | 李莹峰            |

| 规格<br>DESCRIPTION:     | 品名<br>P/N: | 图号<br>DRAWN NO: |
|------------------------|------------|-----------------|
| DC PLUG 05.5*02.5*18.5 | 5525TV185  | CP-01-0104      |