
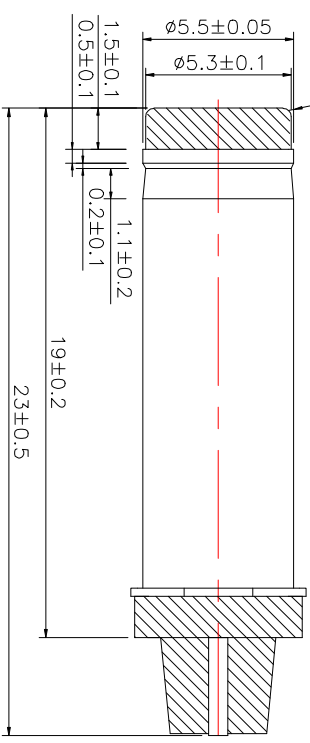


ROHS

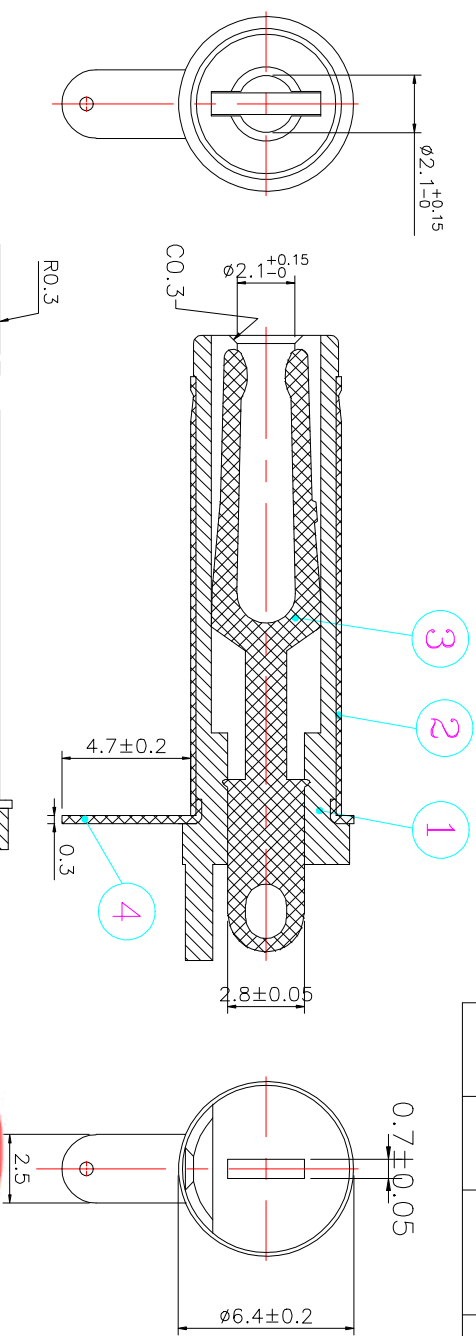

Technology Request:  
 1. Outlook: No burr, no hurt.  
 2. Electronic performance:  
 a: Insulation resistance: Above DC500V/100M Ω;  
 b: Endure voltage: AC500V at 1 minute;  
 c: Contact resistance: Under 30m Ω;  
 3. Insertion force & withdrawal force: 0.3-3kgf.  
 4. Salt spray test: 48H.  
 5. Meet ROHS.  
 6. Remark \* is important specification.

原 本 REV	修正前 REV. TIME	修正后 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

单位 Unit	mm	一般公差 The general tolerance
比例 Scale	5:1	XX: ±0.3
视图 Third angle projection		X: X: ±0.1
		.XX: ±0.05

NO.	1	5521/5焊片 镀锡	H02	镀锡
	2	5521x22音叉片	C5191	Ni 1um-5um
	3	5.48x16车钩管-CX	H05	Ni 1um-5um
	1	PLASTIC	PBT	BLACK
		PART	MATERIAL	PLATING

核准 APPROVED BY	杨义邦	制图 DRAWN BY	李莹峰
检查 CHECKED BY	李莹峰		
日期 DATE	June		

规格 DESCRIPTION:	DC PLUG $\phi 5.5 \times \phi 2.1 \times 23$
品名 P/N:	5521TVDL230
图号 DRAWN NO:	CP-01-0101

东莞市铂高电子有限公司