
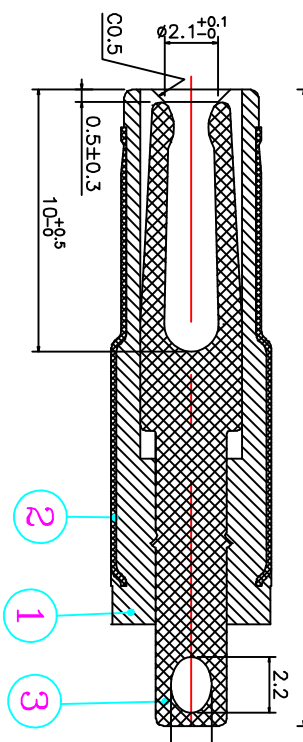


ROHS

| REV | REV. DATE | REV. BY | REV. DATE |
|------|-----------|---------|-----------|
| V1.0 | June | 李莹峰 | 20181203 |
| | | | |
| | | | |

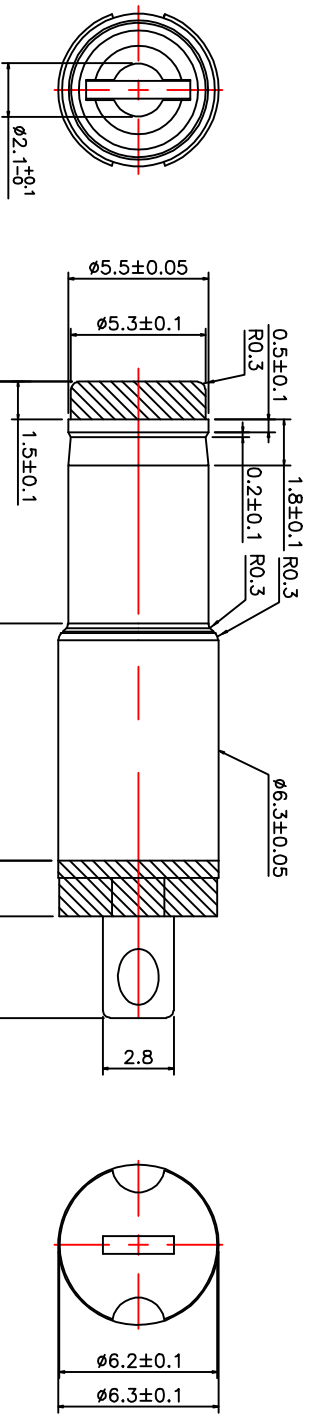

东莞市铂高电子有限公司

Technology Request:

1. Outlook: No burr, no hurt.

2. Electronic performance:

3. Insulation resistance: Above DC500V/100MQ;

b: Endure voltage: AC500V at 1 minute;

c: Contact resistance: Under 30mΩ;

3. Insertion force & withdrawal force: 0.3-3kgf.

4. Salt spray test: 24h.

5. Meet RoHS.

6. Remark * is important specification.

| Unit | mm | 公差 | 7 | 7 | 7 | 7 | 7 | 7 |
|-------|----------|----------|----------------------|----------|------------|------|-----|-----|
| 比例 | 5:1 | XX:±0.3 | 5 | 5 | 5 | 5 | 5 | 5 |
| 第三角投影 | X.X:±0.1 | XX:±0.05 | 1 | 1 | 1 | 1 | 1 | 1 |
| 公差 | | | NO. | NO. | NO. | NO. | NO. | NO. |
| 材料 | | | 5521*24.5*2.6 塑料片 | C5191 | Ni 2um~3um | June | 杨义邦 | 李莹峰 |
| 材料 | | | 5.5*18*6.3 塑料片 | H65 | Ni 2um~3um | | | |
| 材料 | | | PLASTIC | PBT | BLACK | | | |
| 材料 | | | PART | MATERIAL | PLATING | | | |
| 规格 | | | DC PLUG 05.5*02.1*25 | | | | | |
| 品名 | | | 5521TV250-63 | | | | | |
| 图号 | | | CP-01-0143 | | | | | |