
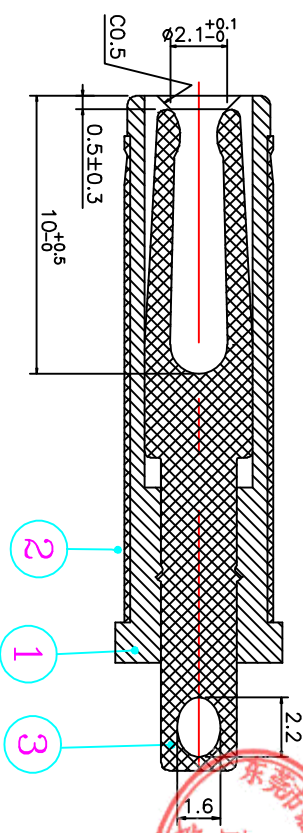


ROHS

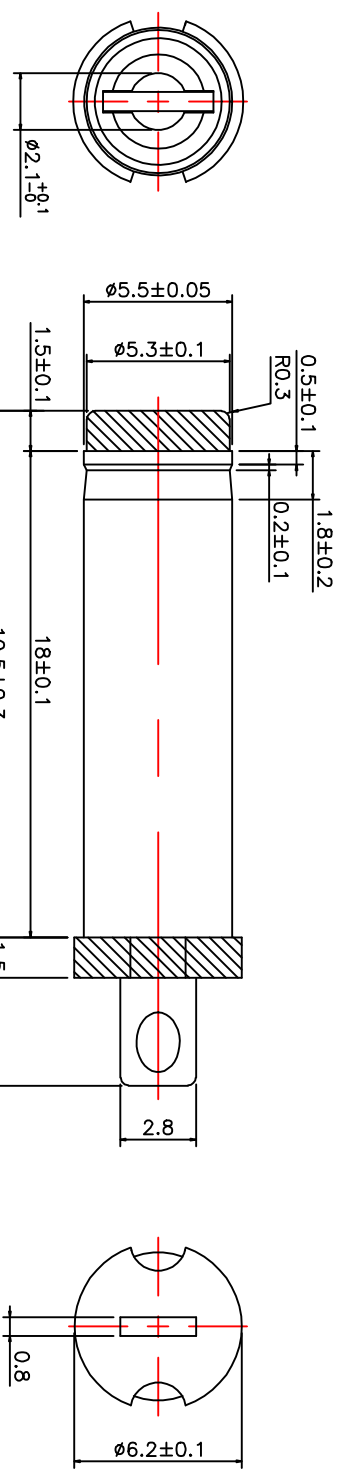

Technology Request:  
 1.Outlook: No burr, no hurt.  
 2.Electronic performance:  
 dielectric insulation resistance:  
 Above DC500V/100MQ;  
 b:Endure voltage:  
 AC500V at 1 minute;  
 c>Contact resistance:  
 Under 30mΩ;  
 3.Insertion force & withdrawal force:  
 0.3-3kgf.  
 4.Salt spray test:24H.  
 5.Meet RoHS.  
 6.Remark \* is important specification.

版本 REV	修正标识 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

单位 Unit	mm
比例 Scale	5:1
第三角 Third angle projection	X.X:±0.1
公差 Tolerance	.XX:±0.05

7	一般公差 The general tolerance	
6		
5		
4	5521*24.5黄芯片	BRONZE(G5191)
3	5.48*18黄铜管	BRASS(H65)
2	PLASTIC	NI 40~120μ
1	PART	PBT+15%GFUL94V0
NO.	MATERIAL	PLATING

7	批准 APPROVED BY	June
6	校对 CHECKED BY	杨义邦
5	制图 DRAWN BY	李莹峰

规格 DESCRIPTION:		DC PLUG 2.1*2.1*25
品名 P/N:		5521TV250
图号 DRAWN NO:		CP-01-0102

东莞市铨高电子有限公司

1 2 3 4 5 6 7 8 9