
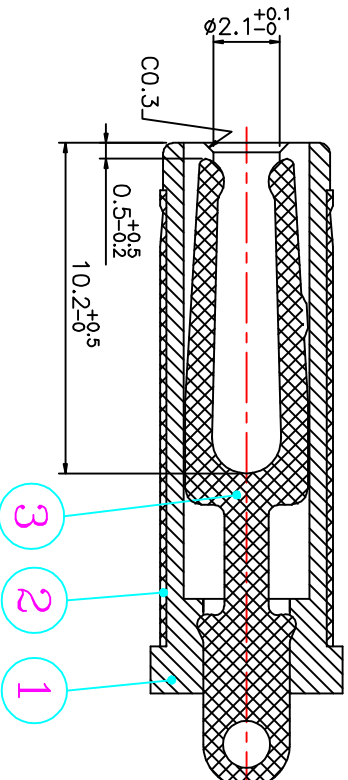


ROHS

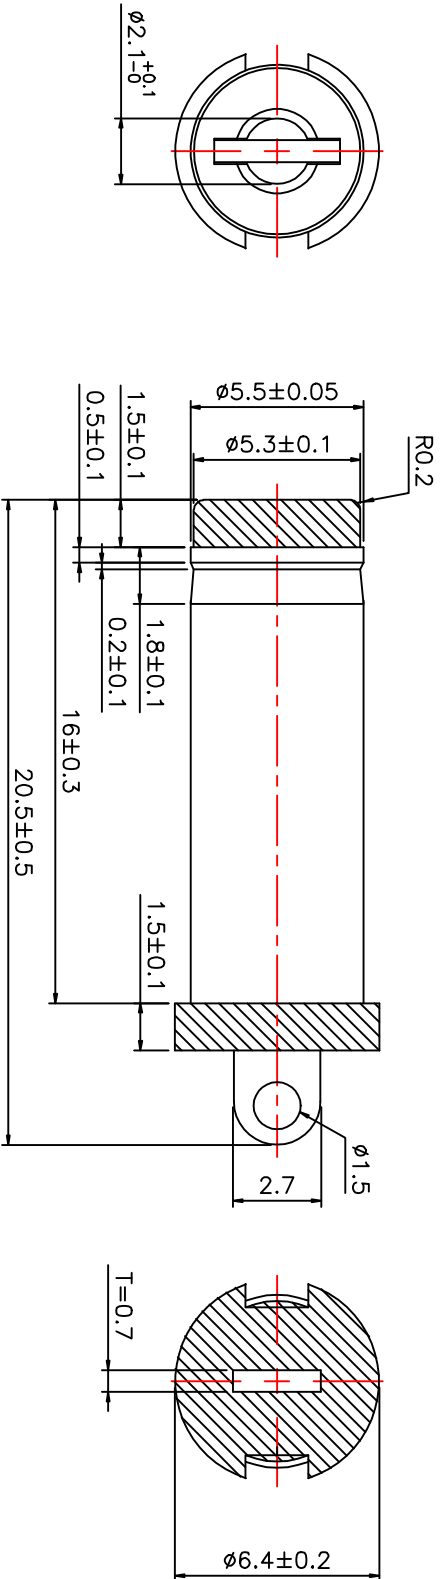

Technology Request:
 1. Outlooking: No burr, no hurt.
 2. Electronic performance:
 a. Insulation resistance: Above DC500V/100MΩ;
 b. Endure voltage: AC500V at 1 minute;
 c. Contact resistance: Under 30mΩ;
 3. Insertion force & withdrawal force: 0.3-3kgf.
 4. Salt spray test: 24H.
 5. Meet RoHS.
 6. Remark * is important specification.

版本 REV	修正标记 REVLR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

单位 Unit	一般公差 The General Tolerance
mm	
比例 Scale	XX.:±0.3
视图 Third angle projection	X.X:±0.1
	.XX:±0.05

批准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰

零件 PART	材料 MATERIAL	描述 DESCRIPTION	品名 P/N:	图号 DRAWN NO:
5521*20毫米片	C5191	DC PLUG $\phi 5.5 \times \phi 2.1 \times 20.5$		
5.48*14.5毫米管	H65		5521TV205	
1	PBT			CP-01-0085
NO.	PLATING			

东莞市轴高电子有限公司