
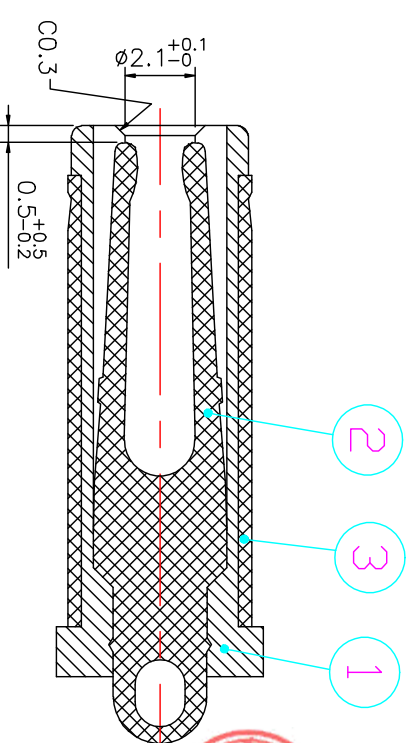



ROHS

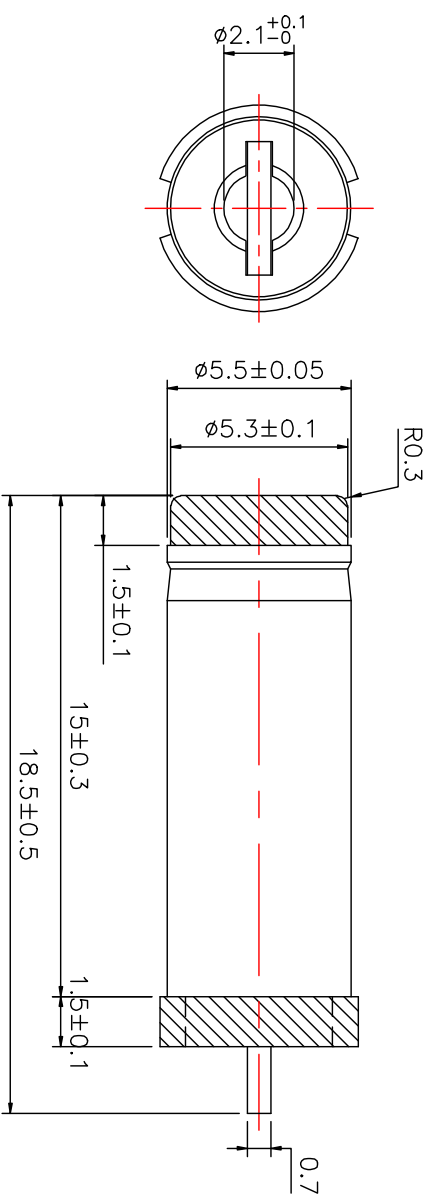

Technology / Request:  
 1. Outlook: no burr, no hurt.  
 2. Electronic performance:  
 a: Insulation resistance: Above DC500V/100MΩ;  
 b: Endure voltage: AC500V at 1 minute;  
 c: Contact resistance: Under 30mΩ;  
 3. Insertion force & withdrawal force: 0.3-3kgf.  
 4. Salt spray test: 24h.  
 5. Meet RoHS.  
 6. Remark \* is important specification.

REV	修正描述	修正前	修正后	签名	日期
REV	REV/IR	BEFORE REVISION	AFTER REVISION	SIGN	DATE
V1.0		新版制定		June	20190215

单位	一般公差	7
Unit	The general tolerance	
mm		
比例	XX:±0.3	5
Scale		4
视图	5.48*1.3.5.车削管	3
Third angle projection	5521*1.8.管刀片	2
	PLASTIC	1
	NO1	

批准	校对	制图
APPROVED BY	CHECKED BY	DRAWN BY
June	杨义邦	李莹峰

规格	品名	图号
DESCRIPTION:	P/N:	DRAWN NO:
DC PLUG φ5.5*2.1*18.5	5521TV185	CP-01-0081

东莞市铨高电子有限公司

1 2 3 4 5 6 7 8 9