

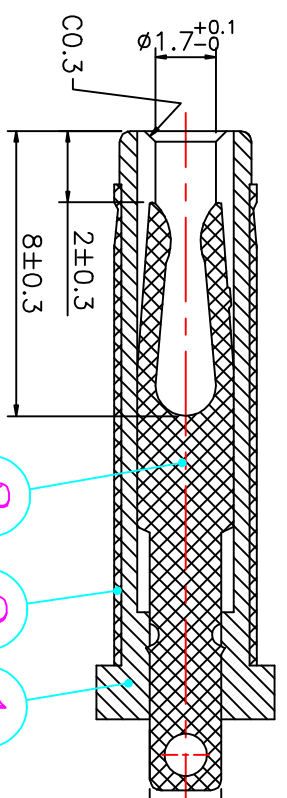
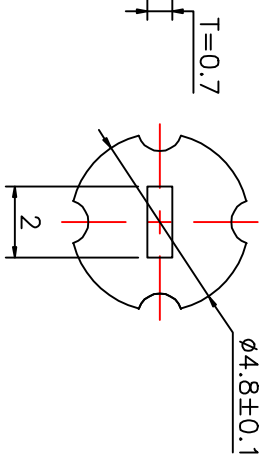
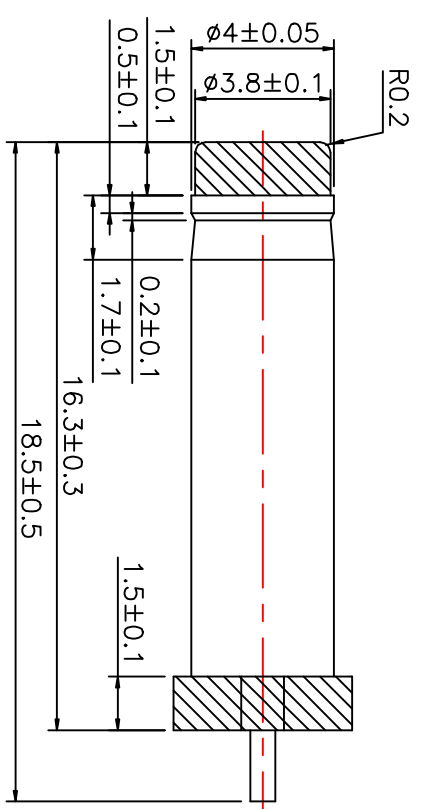


ROHS



Technology Request:  
 1.Outlook: No burr, no hurt.  
 2.Electronic performance:  
 a:Insulation resistance:  
 Above DC500V/100MΩ;  
 b:Endure voltage:  
 AC500V at 1 minute;  
 c:Contact resistance:  
 Under 30mΩ;  
 3.Insertion force & withdrawal force:  
 0.3-3kgf.  
 4.Salt spray test:24H.  
 5.Meet RoHS.  
 6.Remark \* is important specification.

版本 REV	修正标识 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917
V1.1		PCU胶料	PA66胶料	June	20190916

单位 Unit	mm	一般公差 The general tolerance
比例 Scale	5:1	XX:±0.3
视图 Third angle projection	X:X:±0.1	
	.XX:±0.05	

批准 APPROVED BY	杨义邦	制图 DRAWN BY	李莹峰
检查 CHECKED BY	杨义邦		
材料 MATERIAL	PLASTIC	镀层 PLATING	BLACK

规格 DESCRIPTION:	DC PLUG 4.0*1.7*18.5
品名 P/N:	4017TV185M20YE
图号 DRAWN NO.:	CP-01-0068

东莞市铀高电子有限公司