


PANEL CUT-OUT

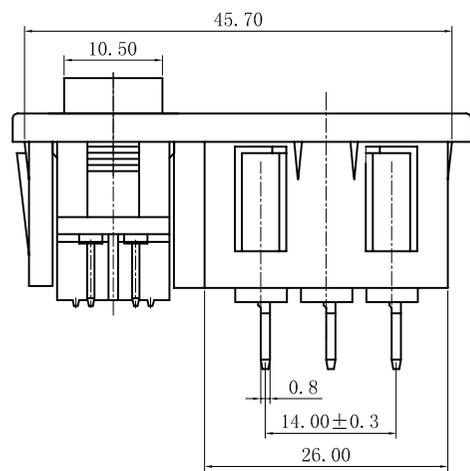

器具插座	器具开关
<p>Rating :            15A 250V AC T105 UL cUL            10A 250V AC VDE 3C KC            Fuse : 250VAC 6.3A 2.5W            Insert And Extract Force: 36kgf~6.8kgf</p> <p>Terminal Strength:            ≥80N            Operating Life: ≥5000 cycles</p> <p>Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min            terminals to Base: 3750V            AC (50-60Hz) 1min            Leakage Current : 1mA            Insulation Resistance: ≥100MΩ 500V DC</p>	<p>Rating:            CQC 6A 250V AC T85            UL cUL 10A 125V AC / 6A 250V AC            VDE 6(4)A 250V AC T85/55            KC 6(4)A 250V</p> <p>Circuit Diagram: 4P ON-OFF</p> <p>Terminal Strength: ≥80N</p> <p>Electrical life: ≥10000 cycles</p> <p>Withstand Voltage: Withstand Voltage: 1800VAC 1min            Terminals to Button: 3000VAC 1min</p> <p>Leakage Current: 1mA</p> <p>Current resistance: ≤50mΩ (initial)</p> <p>Insulation resistance: ≥100MΩ</p>

A4				普通公差	<b>东莞市铀高电子制品有限公司</b>								
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单位	mm	投影	☉	品名	Ac Inlet C14型	比例	Free
A1				ABOVE 5 TO 30	±0.30	UNIT		PROJECTED		PRODUCT NAME			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	绘图	吴瑜	核对		型号	YG-14-5F(1.5)+RS601D1-2010011BB-3A		
						日期	2012.02.10	核准		图号	145FRS601D2010011BB-3A		
						DATE		APPROVAL BY		DWG NO.			