

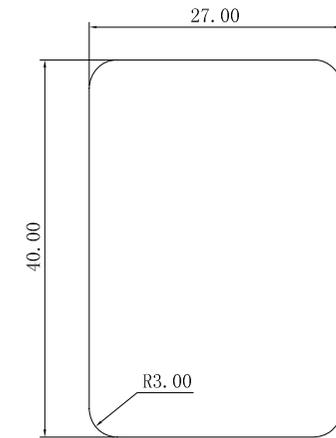


Section A-A

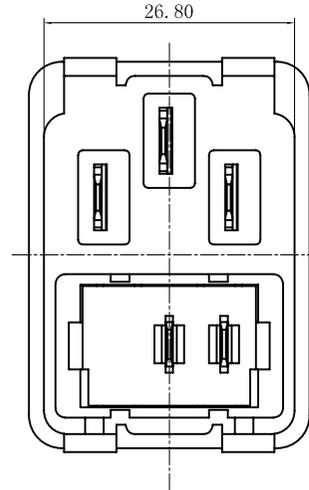

PANEL CUT-OUT



<p>Rating :          15A 250V AC T105 UL cUL          10A 250V AC VDE 3C          Fuse : 250VAC 6.3A 2.5W          Insert And Extract Force: 1.36kgf~6.8kgf          Terminal Strength: <math>\geq 80N</math>          Operating Life: <math>\geq 5000</math> cycles          Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min          AC (50-60Hz) 1min          Leakage Current : 1mA          Insulation Resistance: <math>\geq 100M\Omega</math>          500V DC</p>	器具插座	<p>Rating :          10A 250V AC UL cUL          6(4)A 250V AC VDE          6A 250VAC T85 CQC          Terminal Strength: <math>\geq 80N</math>          Operating Life: <math>1 \times 10^4</math> cycles          Withstand Voltage: Between all terminals: 1000VAC 5S          terminals to Button: 3800VAC 5S          Leakage Current : 1mA          Insulation Resistance: <math>\geq 100M\Omega</math>          Contact resistance: <math>\leq 20m\Omega</math></p>	器具开关
--	------	--	------

A4				普通公差	<b>东莞市铀高电子制品有限公司</b>								
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单位	mm	投影		品名	Ac Inlet C14型	比例	Free
A1				ABOVE 5 TO 30	±0.30	UNIT		核校		PRODUCT NAME		SCALE	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	绘图	吴瑜	核对		型号	YG-14-2F+RS601A-10111BB		
						日期	2009.06.24	核准		图号	142FRS601A10111BB		
						DATE		APPROVAL BY		DWG NO.			