


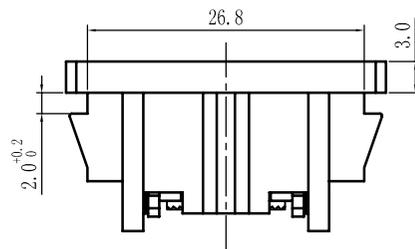


section A-A

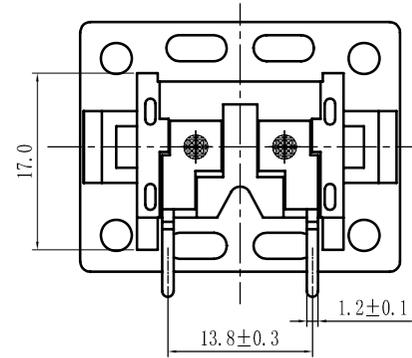

Rating :

5A 250V AC T105 UL cUL
2.5A 250V AC VDE 3C KC

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: $\geq 80N$

Operating Life: ≥ 5000 cycles

Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min

terminals to Base:3750V AC (50-60Hz)1min

Leakage Current : 1mA

Insulation Resistance: $\geq 100M\Omega$ 500V DC

A4				普通公差		东莞市铀高电子制品有限公司					
A3				COMMON TOLERANCE :							
A2				UP TO 5	± 0.20	单位	mm	投影	Ac Inlet C8型	比例	Free
A1				ABOVE 5 TO 30	± 0.30	UNIT		PROJECTED			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	$\pm 5^\circ$	绘图	吴瑜	核对	品名	型号	图号
						DRAWN BY		CHECKED BY	Ac Inlet C8型	3K-8-8P22	88P22(2.0)
						日期	2009.06.21	核准	MODEL NO.		
						DATE		APPROVAL BY	DWG NO.		