



PCB LAYOUT

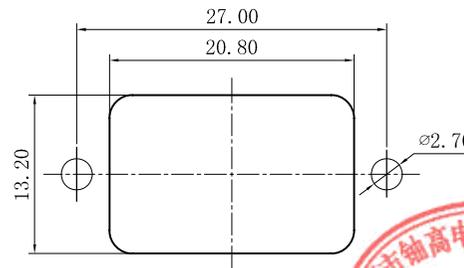

PANEL CUT-OUT

Rating :
 5A 250V AC T105 UL cUL
 2.5A 250V AC VDE 3C KC
 Insert And Extract Force: 1.36kgf~6.8kgf
 Terminal Strength: $\geq 80N$
 Operating Life: ≥ 5000 cycles
 Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min
 terminals to Base: 3750V AC (50-60Hz) 1min
 Leakage Current : 1mA
 Insulation Resistance: $\geq 100M\Omega$ 500V DC

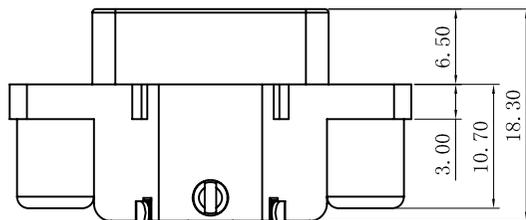

A4				普通公差		东莞市铀高电子制品有限公司							
A3				COMMON TOLERANCE									
A2				UP TO 5	± 0.20	单位	mm	投影		品名	Ac Inlet C8型	比例	Free
A1				ABOVE 5 TO 30	± 0.30	UNIT		PROJECTED		PRODUCT NAME		SCALE	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	$\pm 5^\circ$	绘图		核对		型号	YG-8-7AP20		
						DRAWN BY		CHECKED BY		MODEL NO.			
						日期		核准		图号	87AP20		
						DATE		APPROVAL BY		DWG NO.			