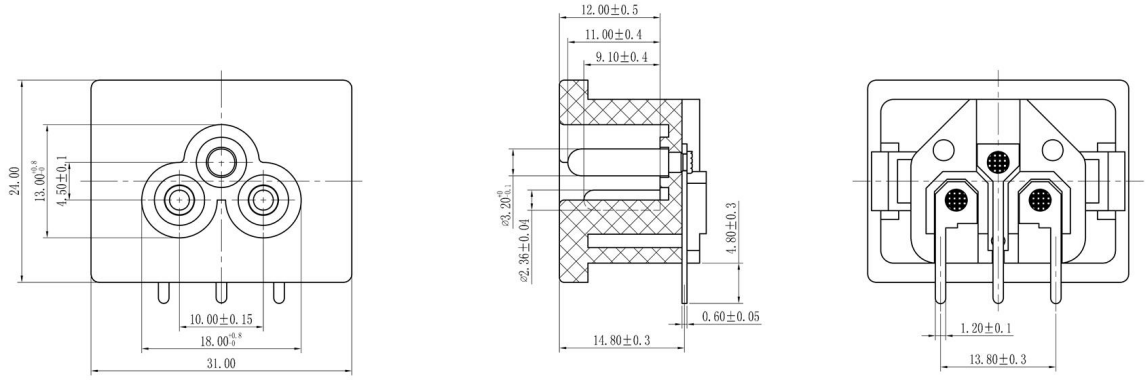

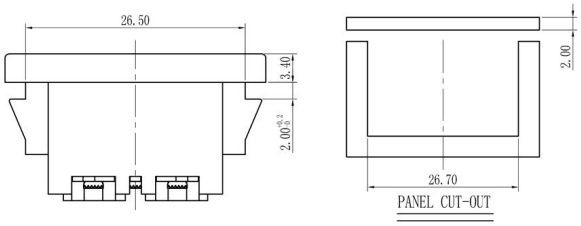

Rating :
5A 250V AC
2.5A 250V AC

Insert And Extract Force:	1.36kgf~6.8kgf
Terminal Strength:	≥80N
Operating Life:	≥5000 cycles
Withstand Voltage:	Between all terminals:2500VAC (50-60Hz)1min
	terminals to Base:3750V AC (50-60Hz)1min
	Leakage Current : 1mA
Insulation Resistance:	≥100MΩ 500V DC

东莞市铀高电子制品有限公司 正版认证 受控文件

A4				普通公差 COMMON TOLERANCE			东莞市铀高电子制品有限公司				
A3						单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	Ac Inlet C8型
A2				UP TO 5	±0.20						比例 SCALE: Free
A1				ABOVE 5 TO 30	±0.30	绘图 DRAWN BY		核对 CHECKED BY		型号 MODEL NO.	YG-6-2P19P6
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	±0.50						
				ANGULAR	±5°	日期 DATE		核准 APPROVAL BY		图号 DWG NO.	62P19P6(2.0)