
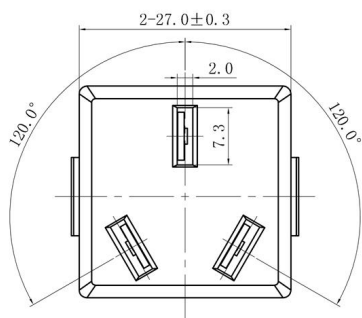


PANEL THICKNESS: 1.0-1.5mm
PANEL HOLE SIZE

Rating :

10A 250V AC

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: $\geq 80N$

Operating Life: ≥ 5000 cycles

Withstand Voltage: Between all terminals: 2000VAC (50-60Hz) 1min
terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current : 1mA

Insulation Resistance: $\geq 100M\Omega$ 500V DC

A4				普通公差					东莞市铀高电子制品有限公司
A3				COMMON TOLERANCE :					
A2				UP TO 5	± 0.20	单位	mm	投影	品名
A1				ABOVE 5 TO 30	± 0.30	UNIT		PROJECTED	Ac Outlet
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	± 0.50	绘图	吴瑜	核对	型号
				ANGULAR	$\pm 5^\circ$	DATE	2009.08.07	核准	图号
								APPROVAL BY	DRG NO.