
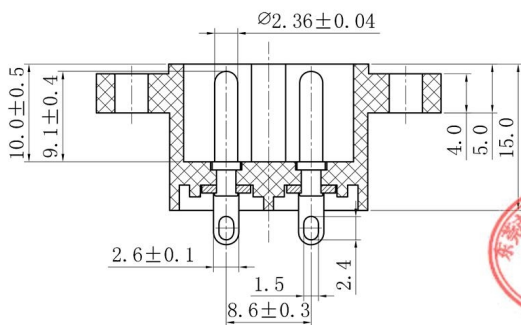
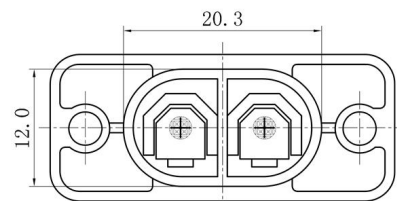



PANEL CUT-OUT

Rating :
5A 250V AC
2.5A 250V AC
Insert And Extract Force: 1.36kgf~6.8kgf
Terminal Strength: $\geq 80N$
 ≥ 5000 cycles
Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min
Operating Life: terminals to Base: 3750V AC (50-60Hz) 1min
Leakage Current : 1mA
Insulation Resistance: $\geq 100M\Omega$ 500V DC

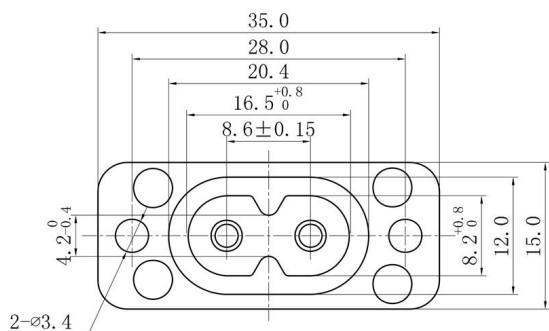

A4				普通公差		东莞市铀高电子制品有限公司					
A3				COMMON TOLERANCE							
A2				UP TO 5	±0.20	单位	mm	投影	品名	Ac Inlet C8型	比例
A1				ABOVE 5 TO 30	±0.30	UNIT		PROJECTED	PRODUCT NAME		SCALE
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	±0.50	绘图	吴瑜	核对	吴路方	型号	YG-8-7S1
				ANGULAR	±5°	日期	2010.06.22	核准	周培雷	图号	87S1
						DATE		APPROVAL BY		DRG NO.	