

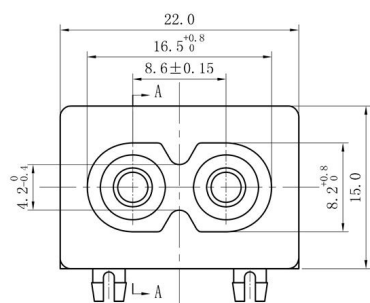




Section A-A



PANEL CUT-OUT

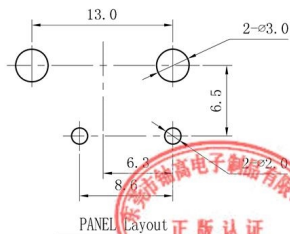

PANEL Layout

Rating :
5A 250V AC
2.5A 250V AC
Insert And Extract Force: 1.36kgf~6.8kgf
Terminal Strength: ≥80N
Operating Life: ≥5000 cycles
Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
terminals to Base:3750V AC (50-60Hz)1min
Leakage Current : 1mA
Insulation Resistance: ≥100MΩ 500V DC

A4				普通公差			东莞市铀高电子制品有限公司						
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	Ac Inlet C8型	比 例	Free
A1				ABOVE 5 TO 30	±0.30	UNIT		PROJECTED		PROJECT NAME		SCALE	
				ABOVE 30	±0.50	绘 图	吴 瑜	核 对		型 号		YG-8-4P8	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期	2011.09.15	核 准		图 号		84P8	
						DATE		APPROVAL BY		DRG NO.			