


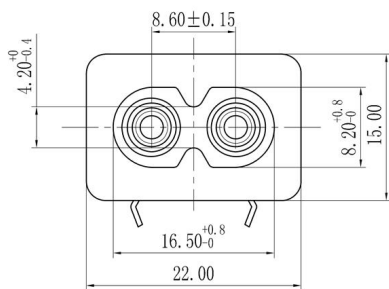


Rating :  
5A 250V AC  
2.5A 250V AC

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength:  $\geq 80N$

Operating Life:  $\geq 5000$  cycles

Withstand Voltage: Between all terminals: 2500V AC (50-60Hz) 1min  
terminals to Base: 3750V AC (50-60Hz) 1min  
Leakage Current : 1mA

Insulation Resistance:  $\geq 100M\Omega$  500V DC

|      |      |                      |       |                    |               |               |            |             |              |              |
|------|------|----------------------|-------|--------------------|---------------|---------------|------------|-------------|--------------|--------------|
| A4   |      |                      |       | 普通公差               |               | 东莞市铰高电子制品有限公司 |            |             |              |              |
| A3   |      |                      |       | COMMON TOLERANCE : |               |               |            |             |              |              |
| A2   |      |                      |       | UP TO 5            | $\pm 0.20$    | 单位            | mm         | 投影          | 品名           | Ac Inlet C8型 |
| A1   |      |                      |       | ABOVE 5 TO 30      | $\pm 0.30$    | UNIT          |            | PROJECTED   | PRODUCT NAME |              |
|      |      |                      |       | ABOVE 30           | $\pm 0.50$    | 绘图            | 吴瑜         | 核对          | 型号           | YG-8-3P10    |
| REV. | DATE | REVISION DESCRIPTION | ISSUE | ANGULAR            | $\pm 5^\circ$ | 日期            | 2011.09.28 | 核准          | 图号           | 83P10        |
|      |      |                      |       |                    |               | DATE          |            | APPROVAL BY | DRG NO.      |              |