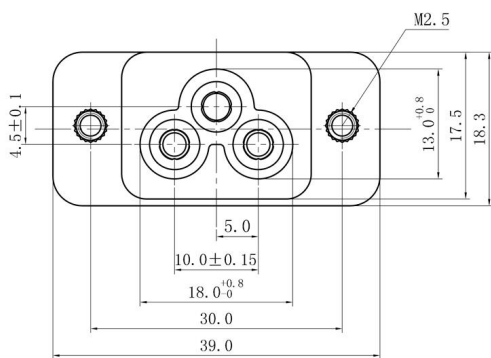


Rating :
5A 250V AC
2.5A 250V AC
Insert And Extract Force: 1.36kgf~6.8kgf
Terminal Strength: $\geq 80N$
Operating Life: ≥ 5000 cycles
Withstand Voltage: Between all terminals: 2500V AC (50-60Hz) 1min
terminals to Base: 3750V AC (50-60Hz) 1min
Leakage Current: 1mA
Insulation Resistance: $\geq 100M\Omega$ 500V DC

A4				普通公差		东莞市铀高电子制品有限公司					
A3				COMMON TOLERANCE							
A2				UP TO 5	± 0.20	单位	mm	投影		品名	Ac Inlet C6型
A1				ABOVE 5 TO 30	± 0.30	UNIT		PROJECTED		比例	Free
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	± 0.50	绘图	吴瑜	校对		型号	YG-6-3TS1S1
				ANGULAR	$\pm 5^\circ$	日期	2010.05.31	核准		图号	63TS1S1
						DATE		APPROVAL BY		DRG NO.	