



PCB. 焊接图


PCB. WELDING DRAWING

主要技术参数、性能

额定电流、电压	0.3A DC30V
接触电阻	≤100mΩ
绝缘电阻	≥100MΩ
耐电压	500VAC
插拔力	3-30N
寿命	5000次
温度范围	-20℃~70℃
湿度范围	-40℃~85℃

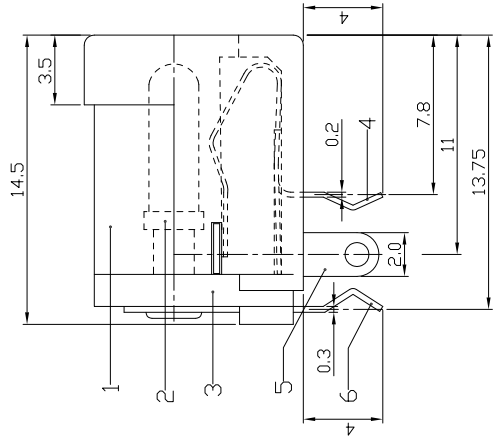

DC MATE PLUG



Model No.	H	I	J
CENTER PIN	φ2.0	φ2.35	φ2.5
PLUG O.D.	2.05 ^{+0.10} _{-0.00}	2.40 ^{+0.10} _{-0.00}	2.55 ^{+0.10} _{-0.00}



绘图	杨瑛平	产品名称	DC JACK
审核	郑金钰	产品型号	YG-DCE0-2410A
批准	林进生	日期	2023.05.19
SHEET	1:1 UNIT mm		

一般公差	
0.5~2	±0.10
2~5	±0.25
5~10	±0.30
ANGLE	±3°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

项目	名称	数量	材料	表面处理/颜色
6	Terminal	1	Brass Strip	Ag Plated
5	Terminal	1	Brass Strip	Ag Plated
4	Spring terminal	1	SUS	Ag Plated
3	Cover	1	Pa66	Black
2	Plug Pin	1	Brass	Ni Plated
1	Case	1	Pa66	Black

东莞市铷高电子有限公司