
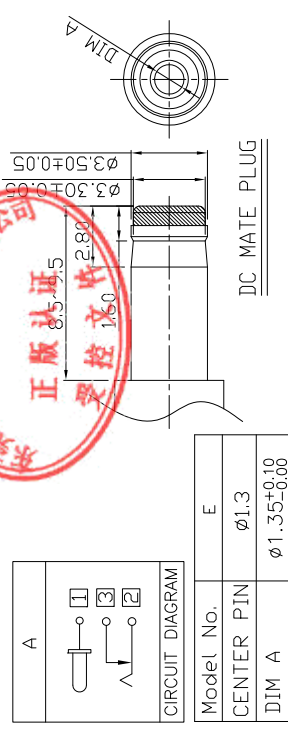


PCB. 焊接图

PCB. WELDING DRAWING

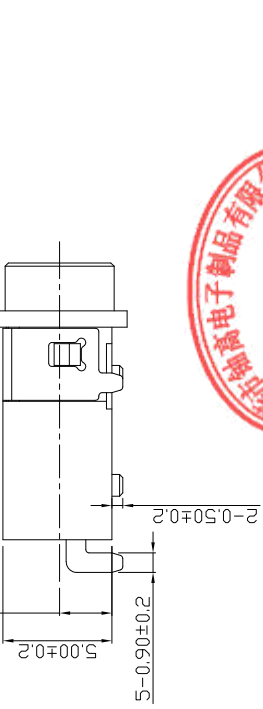

主要技术参数、性能

额定电流、电压	3A DC30V
接触电阻	≤ 50mΩ
绝缘电阻	≥ 100MΩ
耐电压	500VAC
插拔力	3-30N
寿命	5000次
温度范围	-20℃~70℃
湿度范围	-40℃~85℃

RoHS Compliant 2002/95/EC	Process Capable		DC JACK	
产品名称		杨瑛平		DC JACK
产品型号		郑金钰		YG-DCB0-2030A
日期		林进生		2023.05.19
SHEET		1:1 UNIT mm		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				
7	项目	数量	表面处理/颜色	
6	Shield	1	Ni plating	一般公差
5	Shunt Terminal 3	1	Gold Flash	0.5~2 ±0.10
4	Tip Spring 2	1	Gold Flash	2~5 ±0.25
3	Center Pin 1	1	Gold Flash	5~10 ±0.30
2	Cover	1	Black	ANGLE ±3°
1	Housing	1	Black	
名称		材质		
名称		数量	表面处理/颜色	
名称		数量	表面处理/颜色	

东莞市铷高电子制品有限公司