

RoHS Compliant  
2002/95/EC






### 主要技术参数、性能

额定电流、电压	3A DC20V
接触电阻	≤ 50mΩ
绝缘电阻	≥ 100MΩ
耐电压	500VAC
插拔力	3-30N
寿命	5000次
温度范围	-20°C~70°C
湿度范围	-40°C~85°C

### PCB. 焊接图

PCB. WELDING DRAWING

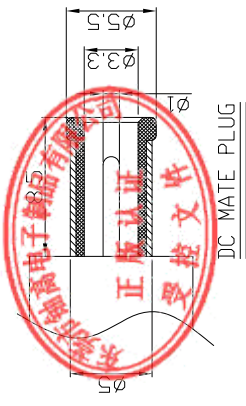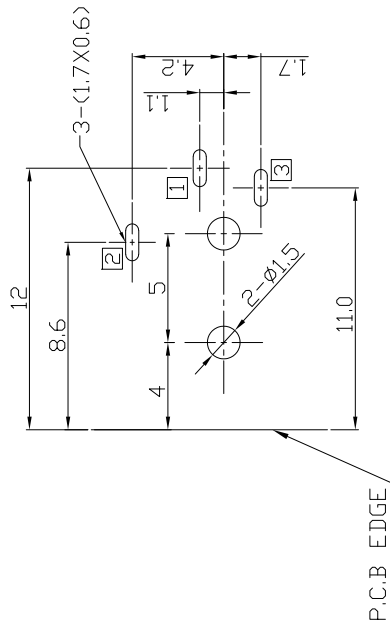

7	绘图	杨瑛平	产品名称	DC JACK
6	审核	郑金钰	产品型号	YG-DCB0-0910A
5	批准	林进生	日期	2023.05.19
4	SHEET	1:1 UNIT mm		
3	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
2	一般公差	±0.10 ±0.25 ±0.30	ANGLE	±3°
1	表面处理/颜色	数量	材质	
7				
6				
5				
4	Shunt Terminal 3	BRASS t=0.3		
3	Tip Spring 2	Phosphor bronze t=0.25		
2	Center Pin 1	Phosphor bronze t=0.2		
1	Housing	PBT		
项目	名称			

东莞市铷高电子有限公司