

RoHS Compliant  
2002/95/EC



### PCB. 焊接图

PCB WELDING DRAWING

### 主要技术参数、性能


额定电流、电压	0.5A DC30V
接触电阻	≤ 30mΩ
绝缘电阻	≥ 100MΩ
耐电压	500VAC
插拔力	3-30N
寿命	5000次
温度范围	-20℃~70℃
湿度范围	-40℃~85℃

7						绘图	杨瑛平	产品名称	DC JACK	
6	Earth Terminal	Brass	1	Cu/Ni plating	±0.10	审核	郑金钰	产品型号	YG-DCB0-044BA	
5	Shunt Terminal	Brass	1	Ni/Ag plating	±0.25	批准	林进生	日期	2023.05.19	
4	Tip Spring	Phospor Bronze	1	Ni/Ag plating	±0.30	SHEET 1:1 UNIT mm				
3	Center Pin Terminal	Brass	1	Ni/Ag plating	±3°					
2	Center Pin	Brass	1	Sn/Cu plating						
1	Housing	PBT/PA9T	1	Black		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				
项目	名称	材质	数量	表面处理/颜色						

DC MATE PLUG

CIRCUIT DIAGRAM

Model No.	G	H	I	J
CENTER PIN	Ø1.65	Ø2.0	Ø2.35	Ø2.5

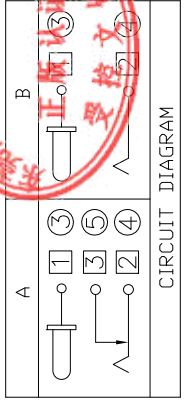

东莞市铷高电子有限公司