




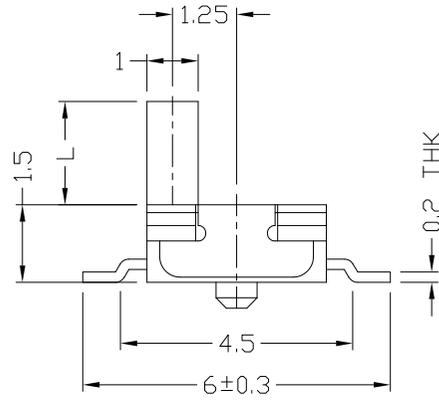

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS


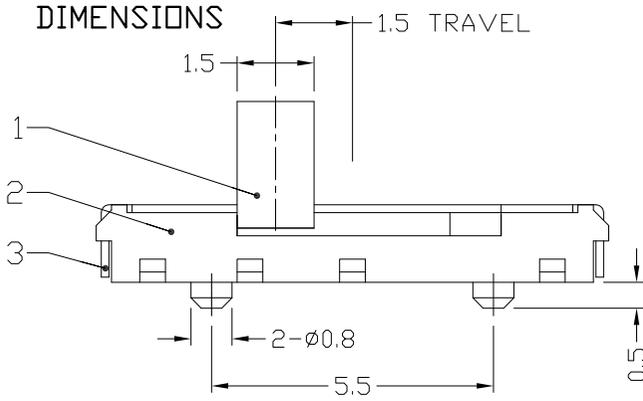


CIRCUIT DIAGRAM

MODEL CODE

YS-1400

L	(mm)
A	1.0
B	2.0
C	1.5

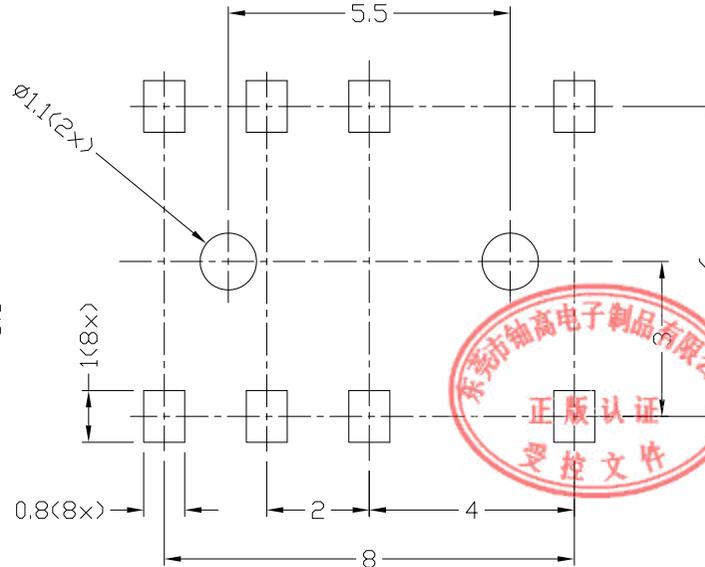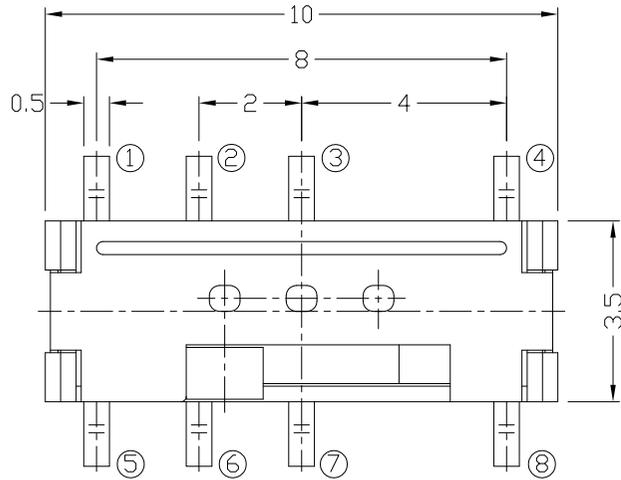

P.C.B LAYOUT
TOP VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2C3P
CONTACT RESISTANCE	70mΩ MAX.
TRAVEL	1.5mm
OPERATING FORCE	200±60gf
OPERATING LIFE(cycles)	10,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6				
5	SPRING PLATE	SUS	1	NATURAL
4	CONTACT	PBS C5210R-EH	2	Ag CLAD
3	COVER	SUS	1	NATURAL
2	CASE	PA46/BRASS STRIP	1	BLACK/Ag PLATED OVER NI PLATED
1	KNOB	PA46	1	BLACK

WITHIN 1.5mm±0.1mm	UNITS mm
OVER 1.5mm±0.2mm	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY

东莞市铀高电子制品有限公司			
TITLE:	MINI SLIDE SWITCH / VERTICAL	PART NO.:	YS-1400
DR:	Ricky 2015/04/14	DWG NO.:	ADL-1400
CHKD:	Ricky 2015/04/14	SCALE	SHEET
APPD:		6:1	1/1
		REV.	A
		CUSTOMER	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

