



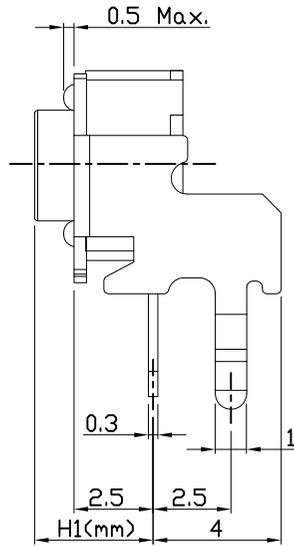

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

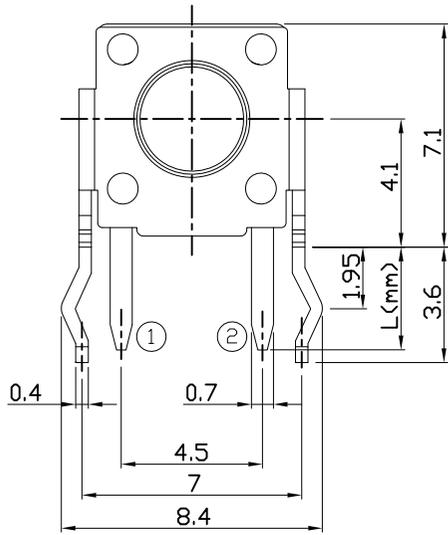

CIRCUIT DIAGRAM



PRODUCT IMAGE



MODEL CODE Knob/Terminal Options



YT-1102H -

H1	H2	øA	L
----	----	----	---

-	3.15	4.3	3.5	3.5
AS	3.35	4.5	3.5	
A	3.85	5.0	3.5	
AL	4.35	5.5	3.4	
Q	4.85	6.0	3.4	
QL	5.35	6.5	3.4	
B	5.85	7.0	3.4	
E	6.15	7.3	3.4	
EL	6.35	7.5	3.4	
C	6.85	8.0	3.4	
CL	7.35	8.5	3.4	
DS	7.85	9.0	3.4	
D	8.35	9.5	3.4	
DL	8.85	10.0	3.0	
KS	9.35	10.5	3.0	
K	9.85	11.0	3.0	
KL	10.35	11.5	3.0	
FS	10.85	12.0	3.0	
F	11.35	12.5	3.0	
FL	11.85	13.0	3.0	
G	12.35	13.5	3.0	
D	12.85	14.0	3.0	
X	13.35	14.5	3.0	
Y	13.85	15.0	3.0	
Z	14.85	16.0	3.0	
J	15.15	16.3	3.0	
I	15.85	17.0	3.0	
T	□2.4X2.4			
TA	□2.8X2.8			

P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

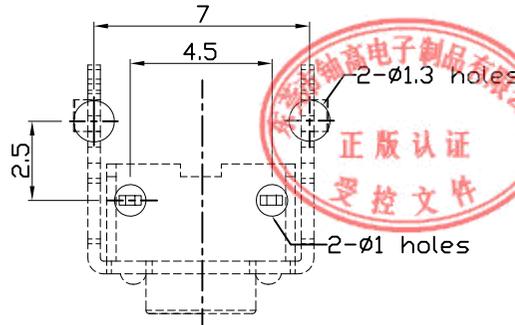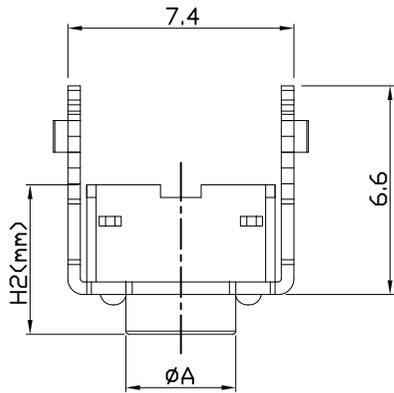

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

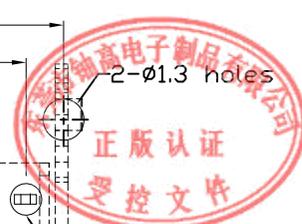

.X ±0.3	X. ±2'	UNITS mm	东莞市铀高电子制品有限公司			
		MAT'L	TITLE: TACT SWITCH		PART NO.: YT-1102H	
		SEE NOTE	DR: Ricky 2014/03/25		DWG NO.: ASI-1102H	
		FINISH	CHKD: Ricky 2014/03/25		SCALE SHEET REV. CUSTOMER	
		SEE NOTE	APPD:		1:1	1/1 A DRAWING
		Q'TY				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.