





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS



P.C.B MOUNTING PATTERN DIMENSION





CIRCUIT DIAGRAM



MODEL CODE

YT-1102MN -		H
-	3.15	
A	3.85	
B	5.85	
D	8.35	
C	6.85	
F	11.35	
E	6.15	

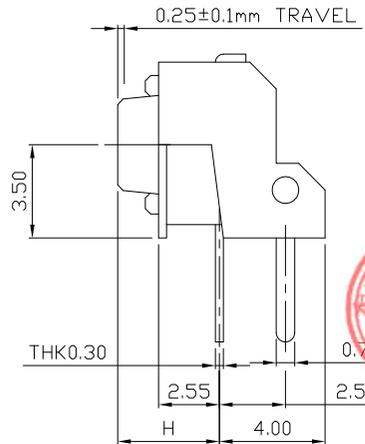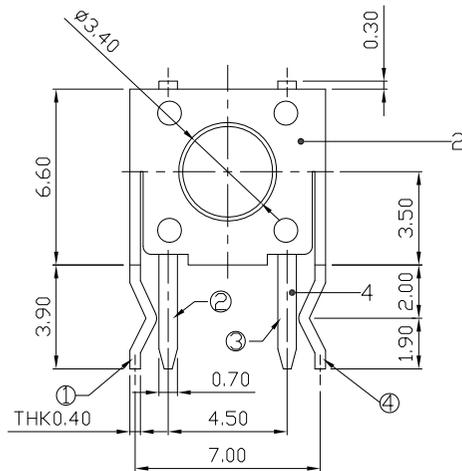

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.25±0.1mm
Operating Force	100/130/160/190±50gf 250±100gf
Operating Life(cycles)	100,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING	
5	CONTACT	PBS	1	Ag CLAD	WITHIN 1.5mm:±0.1mm
4	TERMINAL	BRASS STRIP	2	Ag COATING	OVER 1.5mm:±0.2mm
3	KNOB	NYLON + F.G	1	BLACK	
2	COVER	STEEL STRIP	1	NI COATING	
1	CASE	NYLON + F.G	1	BLACK	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司				
MAT'L	SEE NOTE					
FINISH	SEE NOTE	TITLE:	PART NO.:			
Q'TY		TACT SWITCH	YT-1102MN			
		DR: Ricky 2017/08/03	DWG NO.:			
		CHKD: Ricky 2017/08/03	AZJ-1102MN			
		APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
			4:1	1/1	A	