





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

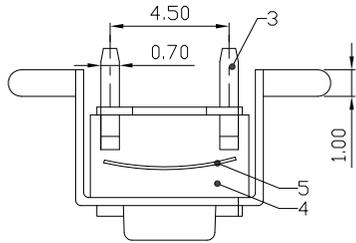

P.C.B MOUNTING PATTERN DIMENSION

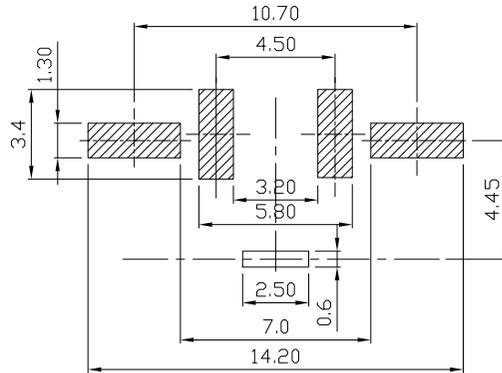



CIRCUIT DIAGRAM



MODEL CODE

YT-1102U12 -

	H
-	3.15
A	3.85
B	5.85
D	8.35
C	6.85
F	11.35
E	6.15
CS	6.55
Q	4.85

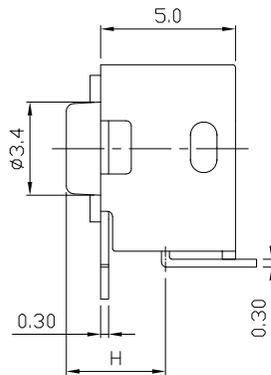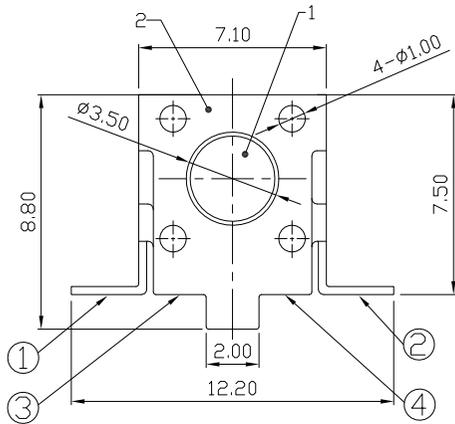

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.25±0.1mm
Operating Force	100/130/160±50gf 250±100gf
Operating Life(cycles)	100,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING	
5	CONTACT	PBS/SUS	1	Ag CLAD	WITHIN 1.5mm:±0.1mm
4	CASE	PPS	1	BLACK	OVER 1.5mm:±0.2mm
3	TERMINAL	BRASS STRIP	2	Ag PLATED	
2	COVER	MILD STEEL	1	Sn PLATED	
1	KNOB	PPA	1	BLACK	

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
		TACT SWITCH	YT-1102U12		
Q'TY		DR: Ricky 2017/08/03	DWG NO.:		
		CHKD: Ricky 2017/08/03	AZJ-1102U12		
		APPD:	SCALE	SHEET	REV.
			6:1	1/1	A
					CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

