



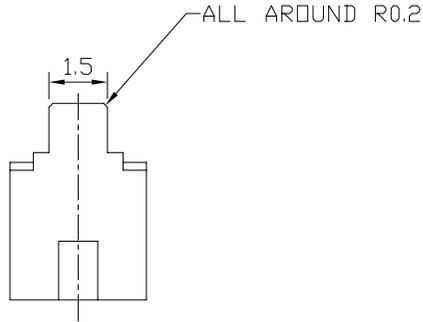

RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

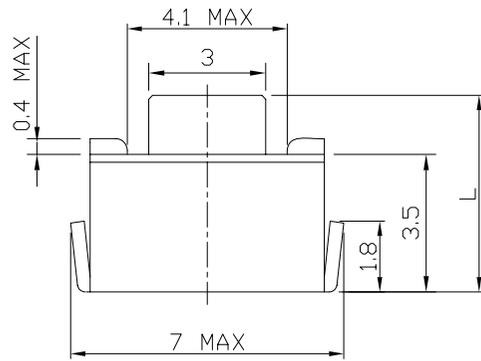

MODEL CODE



YT-1101E



CIRCUIT DIAGRAM

L(mm)	
-	4.3
A	5.0

P.C.B MOUNTING PATTERN DIMENSION

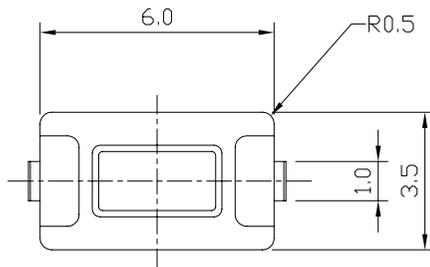

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 50mA MAX
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.25±0.1mm
OPERATING FORCE	180±50gf 250±50gf
OPERATING LIFE(cycles)	50,000



8					.X ±0.3	X. ±2'	UNITS	mm	东莞市铀高电子制品有限公司			
7							MAT'L					
6							SEE NOTE	TITLE:	PART NO.:			
5	CONTACT	SUS 301	1	Ag0.3u			FINISH	TACT SWITCH	YT-1101NH			
4	TERMINAL	C2680R-EH	1	Ag0.3u			SEE NOTE	DR: Ricky 2015/04/27	DWG NO.:			
3	COVER	SPTe	1	Sn			Q'TY	CHKD: Ricky 2015/04/27	AKS-1101NH			
2	STEM	ARLEN(6T)	1				APPD:	SCALE	SHEET	REV.	CUSTOMER	
1	CASE	ARLEN(6T)	1					5:1	1/1	A	DRAWING	
NO.	PARTS	MATERIAL	Q'TY	FINISHING								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.