



RoHS
Compliant
2002/95/EC






MODEL CODE

SS-22F13-GBG

Knob Type	L(mm)
GBG	~

REV.	ECN.	NO.	APPD.

DIMENSIONS

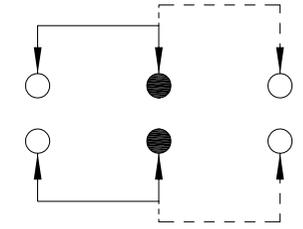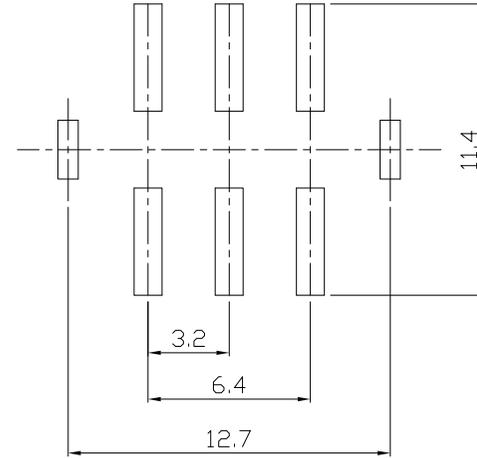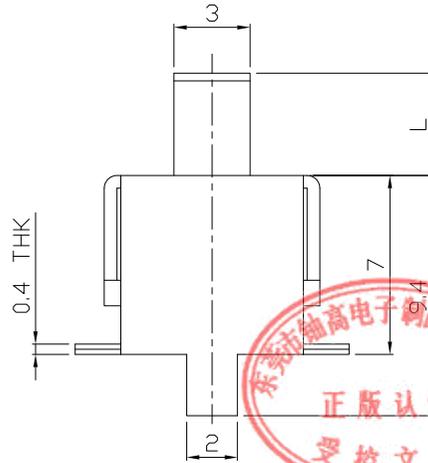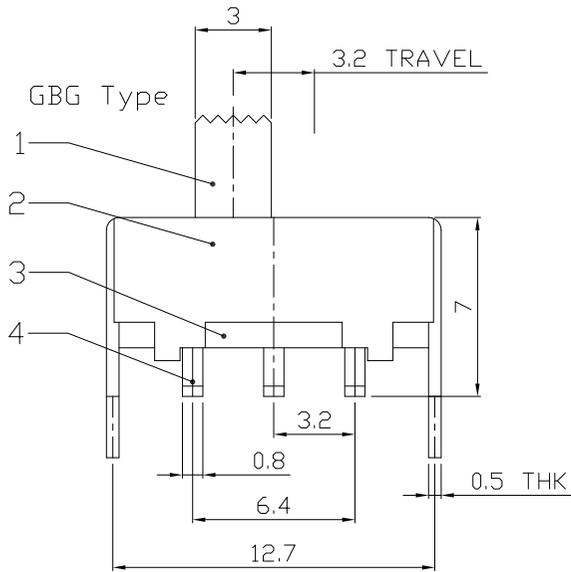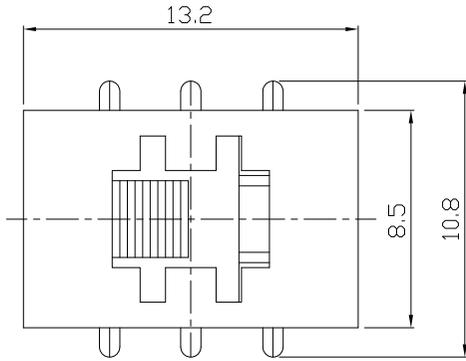

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					
7					
6	CONTACT	BRASS	2	Ag PLATED	
5	SPRING	STEEL WIRE	2	NATURAL	
4	TERMINAL	BRASS STRIP	6	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L
SEE NOTE

FINISH
SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-22F13	
DR: <i>Ricky</i> 2015/09/01		DWG NO.: ADL-22F13	
CHKD: <i>Ricky</i> 2015/09/01		SCALE 3:1	SHEET 1/1
APPD:		REV. A	CUSTOMER DRAWING