

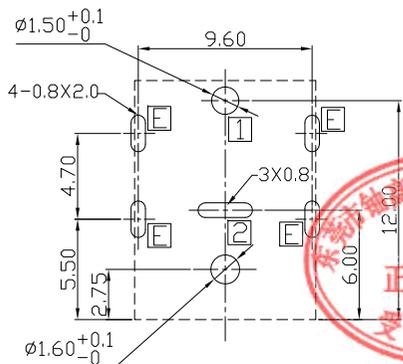

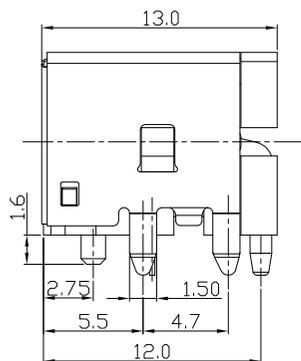
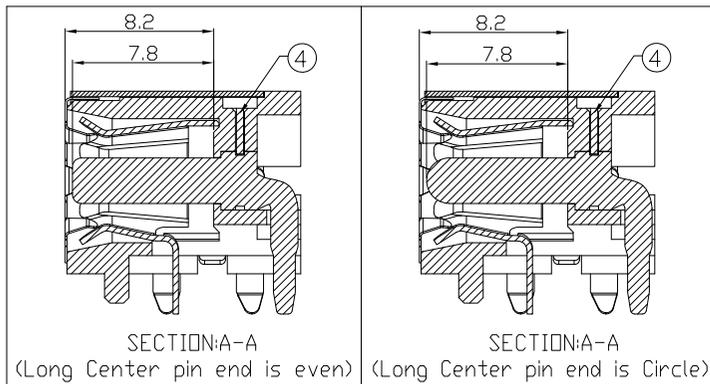




Halogen Free

DIMENSIONS

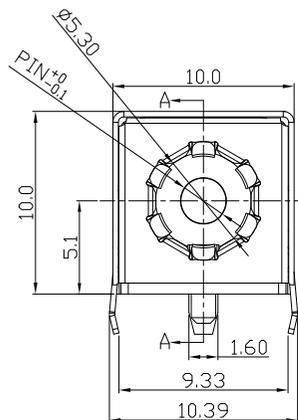

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

MODEL CODE:

DCB0-01460- B □ 10 BK S 0 1

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: B

(4):Center pin diameter:

G=φ1.65 , H=φ2.0 , J=φ2.5

(5):Material of housing:

10=PA10T(Standard)

(6):Housing color:

BK=Black , 3C=Orange(157C)

(7):Terminal plating

T=Tin(Sn) , S=Silver(Ag) , G=Gold(Au)

(8):Special option:

DESCRIPTION	Code	Specification	Plating
Center pin	1	Long Center pin end is even	Ni plating
	A		Au plating
	0	Long Center pin end is Circle	Ni plating
G	Au plating		
Center pin and Ground Terminal	T		Sn plating

(9):Packing mode:

1=Reel packing

3=Plastic box packing

4=Bag packing

SPECIFICATION:

1.Rating : DC 20V 4A;

2.Contact resistance: ≤30mΩ;

After test:≤50mΩ

3.Insulation resistance: ≥100MΩ (DC500V);

After test:≥50MΩ


4.Withstand voltage: 500VAC;

5.Insertion and extraction force: 3-30N;

6.life test: 5,000 cycles;




7.Operation temperature range:-20°C~70°C;

8.Preservative temperature range:-40°C~85°C;



Model No.	G	H	J
CENTER PIN	φ1.65	φ2.0	φ2.5

REV.	ECN. NO.	APPD.

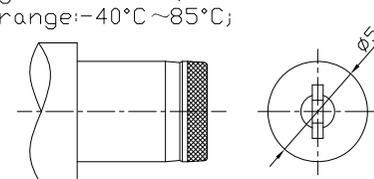

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING
⑥	Ground Terminal [E]	Copper Alloy	1	Tin/Ni plating
⑤	Shield plate	Stainless steel	1	
④	Terminal	Copper Alloy	1	
③	Tip spring [2]	Copper Alloy	1	See "Ordering info"
②	Center pin [1]	Zn Alloy	1	See "Ordering info"
①	Housing	High temp.Thermoplastic	1	Halogen Free, Black

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司

TITLE: DIP DC POWER JACK

PART NO.: DCB0-01460

DR: Ricky 2019/05/03

DWG NO.: AB0-01460

CHKD: Ricky 2019/05/03

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	

APPD: